Tenda

CP6

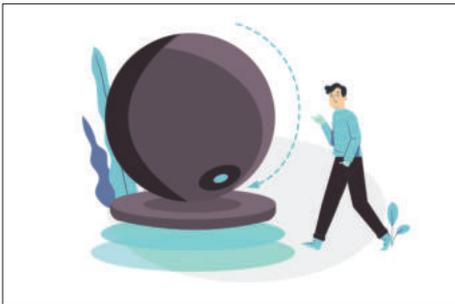## Security Pan / Tilt Camera 2K

The security Pan/Tilt Camera–CP6, is a high–performaned home surveillance Camera that integrates 360° visual coverage with 2K resolution. It is also fetured with full–duplex two–way audio, smart–motion detection/tracking, sound and light alarm functions. The product is mostly used for indoor scenarios monitoring such as homes, shops, offices and classrooms, etc. The users can access the video via wireless or wired connection to the router.

High speed pan/tilt design enables flexible rotation in all directions. CP6 covers 360° horizontally and 155° vertically (90° up, 65° down) which leave zero blind zones at all.
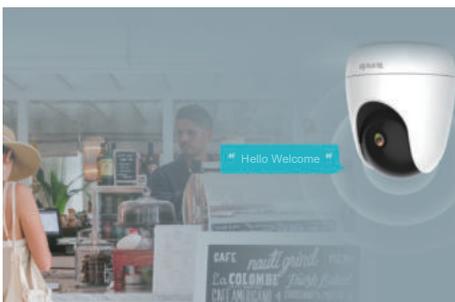
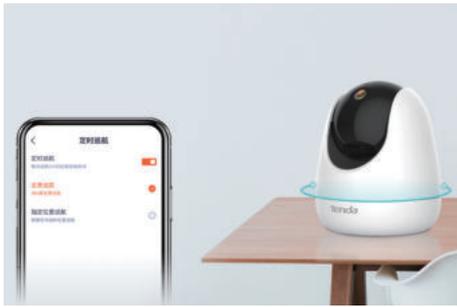he camera rotate downward when the master comes home by tapping on the APP.

Equipped with high sensitive image sensors, CP6 shows the color of delicate image even in low–light condition. The four built–in 850 nm infrared lights adopt enhanced night vision algorithm, producing clearer night vision and increasing the distance of night vision up to 12 m(40ft) .

Based on the AI machine vision algorithms, The "Smart Tracking" can automatically tracks the movements and saves the video in real time.

You can customize 3 personalized audio message for shop greeting or theft deterrence

You can set the pan/tilt partol locations through the TDSEE App, and the camera rotates cyclically according to the preset location to patrol the area.

The video can be stored in local Micro SD card and cloud storage. Even an accident happens to you, you can still retrieve videos based

Real–time full–duplex two–way audio communication function enables you to chat with your family anytime and anywhere, bring– ing the most affectionate greetings to your beloved.

Based on AI deep learning algorithms, CP6 can detect human shape and other motion in time. It recognizes the movement accu– rately and captures suspicious status automatically, The resultin alarms will deliver to your mobile in real time.

When intrusion is detected during the alert period, a sound and flashing white light alarm will be issued to warn illegal intruders. At

Hardware Specifications

Pan/Tilt	Horizontal rotation: 355°, vertical rotation: 155° (90° up, 65° down), support physical shutter lens
Lens	4mm@F2.2
Ports	Storage: Micro SD card (Up to 128G, Class10 and above storage card) Power: DC 9V＝0.6A Ethernet: One RJ45, 10M/100M auto-negotiation Ethernet port
Button	Reset x 1
LED Indicator	Dual color (red & blue) LED indicator x 1
Antenna	Internal antenna
Product Size	103mm*88mm*88mm

Video Parameter

Resolution	2304*1296
Day and Night Shift Mode	ICR infrared filter type
Noise Reduction	3D digital noise reduction
DWDR	Support
Backlight Compensation	Support
ROI	Support

Wireless Parameter

Wireless Standard	IEEE 802.11b/g/n @2.4GHz
Wireless Rate	150Mbps
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK

Others

Smart Alarm	S-motion detection&Human Shape detection
Alarm	Sound and light alarm
Audio	Full-duplex two-way audio
DIY Audio	Up to 3 personalized audio
Auto Patrol	6 preset patrol location

Infrared Night Vision Distance	12 Meters (40ft) (Depending on environment)
Temperature	Operating temperature: −10℃~ 50℃ Storage temperature: −40℃~70℃
Humidity	Operating humidity: 10%−95%RH (non−condensing) Storage humidity: 3% ~ 95%RH (non−condensing)
Certification	CE，RoHs，FCC，RCM
Package Contents	Security Pan/Tilt Camera, Power adapter, Wall−mounted accessory kit, Quick installation guide