

Quick Installation Guide

N300 Wi-Fi 4G LTE Router
4G03 Pro

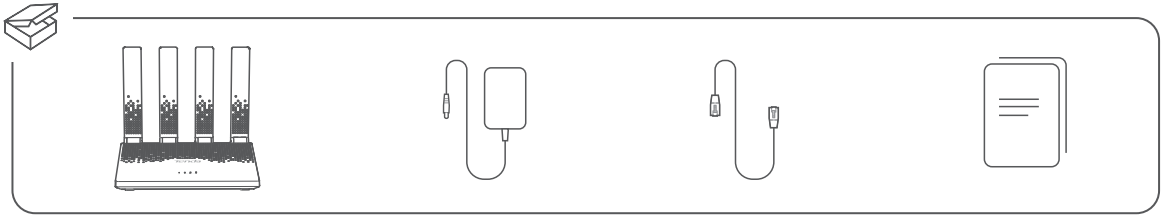

1

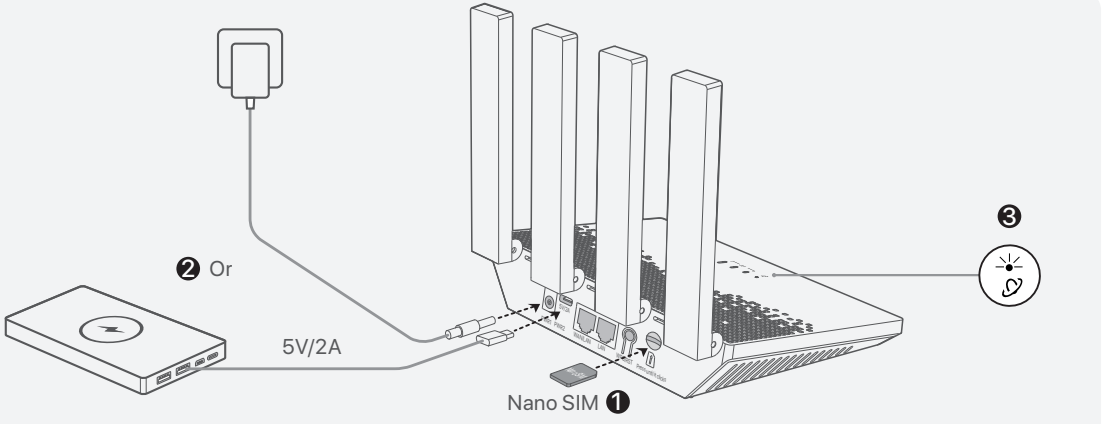


Scan the QR code or visit **www.tendacn.com** for more information. The label showing the product name and model can be found on the bottom of the router.


Video and More Info

2

A

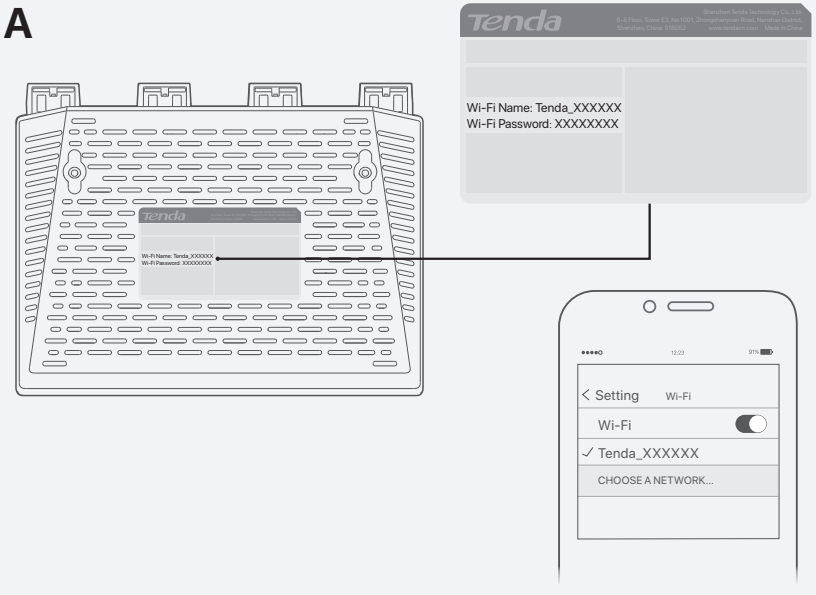

B

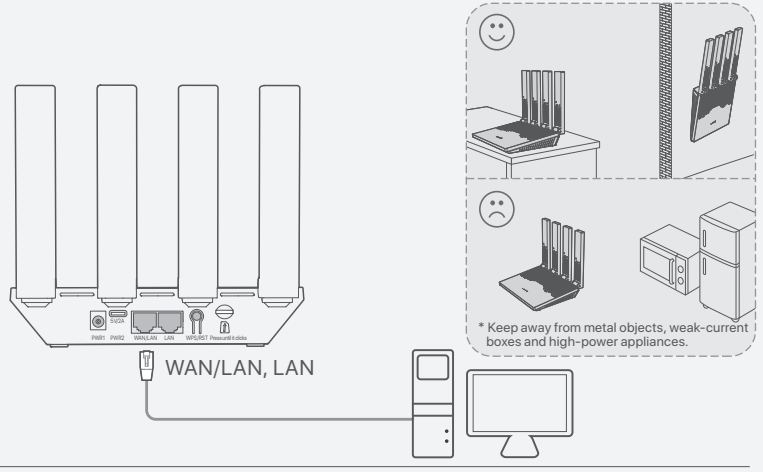

Note

For initial setup or after a reset, it is recommended to visit **http://tendawifi.com** to set new login and Wi-Fi passwords for privacy and security (The longer the password, the stronger the protection). The character limit and composition rules for passwords are subject to software user interface prompts.

Appendix

Indicators

Indicators		Status	Description
	Internet	Solid on	The router is connected to the internet.
		Blinking slowly	No internet access is available.
		Blinking fast	The router is performing WPS negotiation.
		Off	The router is powered off.
	Signal	3 bars	Good signal
		2 bars	Fair signal
		1 bar	Poor signal
		Off	No signal

Jacks, Ports and Buttons

Jacks/Ports/Buttons	Description
PWR1	Use the power adapter to connect the router to a power source.
PWR2	Use a Type-C cable to connect the router to devices such as power banks (5V/2A recommended). Note For stable performance, use a USB-C charging cable within 1.2 meters. Longer or non-compliant cables may cause the router to reboot.
WAN/LAN	Used to connect to devices such as computers, switches or game machines. When the Failover function is enabled, the WAN/LAN port can connect to devices such as ONTs or DSL modems.
LAN	
WPS/RST	– WPS: Press and release the button within 3 seconds to trigger WPS negotiation. – RST: Press and hold the button for at least 8 seconds, then release it to restore factory settings.
	Insert your Nano SIM card into the slot.

Safety Precautions

Before operating, read and follow these precautions to prevent accidents.
– Device operating temperature: -5℃-45℃ (23℉-113℉). Power adapter operating temperature: -5℃-40℃ (23℉-104℉).
– For desktop mounting, the device must be horizontally mounted for safe use.
– For wall mounting, the device is only suitable for mounting at heights ≤ 2 m. Wall-mounting materials are self-prepared (2 screws and 2 plastic anchors). Recommended specifications: [Screws] Thread diameter: 3 mm; Length: 14 mm; Head diameter: 5.2 mm. [Plastic anchors] Inner diameter: 2.4 mm; Length: 26.4 mm.
– Do not use the device in a place where wireless devices are not allowed.
– Use the included power adapter. The mains plug is used as the disconnect device, and shall remain readily operable.
– The power socket shall be installed near the device and easily accessible.
– Do not use any damaged power adapter or Type-C cable to charge the device.
– Keep the device away from water, fire, high electric field, high magnetic field, and inflammable and explosive items.
– Keep this device out of reach of children to prevent children from using it as a toy and causing personal injury.
– If such phenomena as smoke, abnormal sound or smell appear when you use the device, immediately stop using it and disconnect its power supply, unplug all connected cables, and contact the after-sales service personnel.
– Disassembling or modifying the device or its accessories without authorization voids the warranty, and might cause safety hazards.
– Refer all servicing to qualified service personnel.
– Disconnect the power source during servicing.
– Scan the QR code on this guide's cover to view **Symbols on Products and Materials**.

For the latest safety precautions, see **Safety and Regulatory Information** on **www.tendacn.com**.

CE Mark Warning

This is a Class B product.
In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.
This equipment should be installed and operated with a minimum distance 20 cm between the device and your body.
NOTE: (1) The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment.
(2) To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.

Declaration of Conformity

Hereby, SHENZHEN TENDA TECHNOLOGY CO., LTD. declares that the device (Router) is in compliance with Directive 2014/53/EU.
The full text of the EU Declaration of Conformity is available at the following internet address: https://www.tendacn.com/download/list-9.html

Operating Frequency/Max Output Power

2412 MHz-2472 MHz/20 dBm

Frequency Bands and Power

Some frequency bands in which the radio equipment operates may not be available in some countries or areas. Please contact your local ISP for more details.
The maximum radio-frequency power transmitted in the frequency bands in which the radio equipment operates is less than the highest limit value specified in the related Harmonized Standard.
The frequency bands and transmitting power (radiated and/or conducted) nominal limits applicable to this radio equipment are as follows:
Band:
4G LTE Band: B1/B3/B5/B7/B8/B20/B28/B38/B40/B41
WCDMA: B1/B5/B8
LTE Power: 23 ±2 dBm

RECYCLING

This product bears the selective sorting symbol for Waste Electrical and Electronic Equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.
User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.

Australia Cyber Security SoC

Australia Cyber Security SoC is available at the following internet address:
https://www.tendacn.com/au/page/CyberSecuritySoC

Australia Cyber Security SoC

Technical Support

Shenzhen Tenda Technology Co., Ltd.
Floors 6–8, Tower E3, No.1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052
Website: www.tendacn.com
E-mail: support.fwa@tenda.cn (Recommended)
support@tenda.cn
support.uk@tenda.cn (United Kingdom)
support.usa@tenda.cn (North America)
support.au@tenda.cn (Australia)

Copyright ©2026 Shenzhen Tenda Technology Co., Ltd. All rights reserved.
Tenda is a registered trademark legally held by Shenzhen Tenda Technology Co., Ltd. Other brand and product names mentioned herein are trademarks or registered trademarks of their respective holders. Specifications are subject to change without notice.

V1.1 Keep for future reference.