

TEST REPORT

IEC 62368-1

EN IEC 62368-1

BS EN IEC 62368-1

Audio/video, information and communication technology equipment –

Part 1: Safety requirements

Report reference No.: 2402Z107018E-SF

Compiled by (+ signature): Engineer: Jane Tao

Approved by (+ signature): Team Leader: Eric Ding

Date of issue: 2024-12-26

Testing laboratory: Bay Area Compliance Laboratories Corp. (Dongguan)

Address: No.12, Pulong East 1st Road, Tangxia Town, Dongguan,
Guangdong, China

Testing location: See above

Applicant's name: SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Address.....: 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan
District, Shenzhen, China. 518052

Manufacturer's name: SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Address.....: 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan
District, Shenzhen, China. 518052

Factory's name: SHENZHEN TENDA TECHNOLOGY CO.,LTD. DONGGUAN
BRANCH

Address.....: No.3 Gongye West Road II ,Songshanhu Park, Dongguan
City,Guangdong Province,China

Standard: IEC 62368-1:2018

EN IEC 62368-1:2020+A11:2020

BS EN IEC 62368-1:2020+A11:2020

Test sample(s) received: 2024-12-01

Test in period: 2024-12-01 to 2024-12-14

Procedure deviation: N/A

Non-standard test method: N/A

Type of test object : AC1200 Dual-Band Wi-Fi Range Extender

Trademark : **Tenda**



Model name : A18 Pro, A18

Manufacturer : SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Rating : EUT input: 100-240V~, 50/60Hz, 0.4A

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

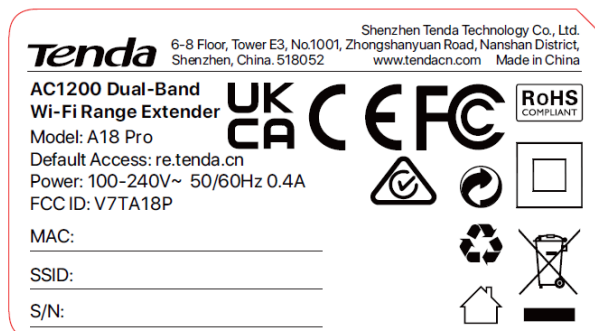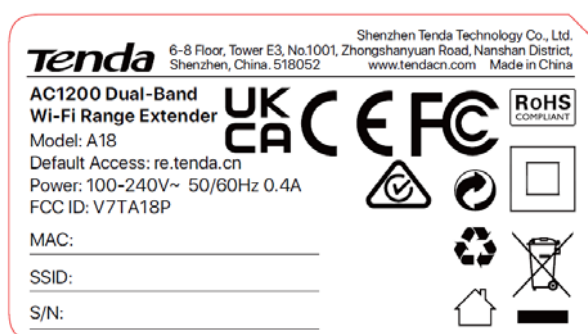

Note:

- The CE marking and UKCA marking should be at least 5,0mm and WEEE symbol (if any) at least 7,0mm respectively in height.
- Manufacturers shall ensure that the equipment bears a type, batch or serial number or other element allowing its identification.
- Manufacturers shall indicate on the electrical equipment their name, registered trade name or registered trade mark and the postal address at which they can be contacted.
- Importers shall indicate on the electrical equipment their name, registered trade name or registered trade mark and the postal address at which they can be contacted.

Test item particulars:			
Product group	<input checked="" type="checkbox"/> end product	<input type="checkbox"/> built-in component	
Classification of use by	<input checked="" type="checkbox"/> Ordinary person <input type="checkbox"/> Instructed person <input type="checkbox"/> Skilled person	<input checked="" type="checkbox"/> Children likely present	
Supply connection	<input checked="" type="checkbox"/> AC mains <input type="checkbox"/> not mains connected: <input type="checkbox"/> ES1 <input type="checkbox"/> ES2 <input type="checkbox"/> ES3	<input type="checkbox"/> DC mains	
Supply tolerance	<input checked="" type="checkbox"/> +10%/-10% <input type="checkbox"/> +20%/-15% <input type="checkbox"/> + %/ - % <input type="checkbox"/> None		
Supply connection – type	<input checked="" type="checkbox"/> pluggable equipment type A - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input checked="" type="checkbox"/> direct plug-in <input type="checkbox"/> pluggable equipment type B - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> permanent connection <input type="checkbox"/> mating connector <input type="checkbox"/> other: <u>not directly connected to the mains</u>		
Considered current rating of protective device	<input checked="" type="checkbox"/> 16 A; (13A for UK) Location: <input checked="" type="checkbox"/> building <input type="checkbox"/> equipment <input type="checkbox"/> N/A		
Equipment mobility	<input type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input checked="" type="checkbox"/> direct plug-in <input type="checkbox"/> stationary <input type="checkbox"/> for building-in <input type="checkbox"/> wall/ceiling-mounted <input type="checkbox"/> SRME/rack-mounted <input type="checkbox"/> other:		
Overvoltage category (OVC)	<input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input type="checkbox"/> other: <u>not directly connected to the mains</u>		
Class of equipment	<input type="checkbox"/> Class I <input checked="" type="checkbox"/> Class II <input type="checkbox"/> Class III <input type="checkbox"/> Not classified <input type="checkbox"/>		
Special installation location	<input checked="" type="checkbox"/> N/A <input type="checkbox"/> restricted access area <input type="checkbox"/> outdoor location <input type="checkbox"/>		
Pollution degree (PD)	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3		
Manufacturer's specified Tma	40°C <input type="checkbox"/> Outdoor: minimum °C		
IP protection class	<input checked="" type="checkbox"/> IPX0 <input type="checkbox"/> IP__		
Power systems	<input checked="" type="checkbox"/> TN <input type="checkbox"/> TT <input type="checkbox"/> IT - V L-L <input type="checkbox"/> not AC mains		
Altitude during operation (m)	<input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> m		
Altitude of test laboratory (m)	<input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> m		
Mass of equipment (kg)	UK plug: 0.169kg EU plug: 0.165kg		

Possible test case verdicts.....:

- test case does not apply to the test object.....: N(N/A)
- test object does meet the requirement.....: P(ass)
- test object does not meet the requirement.....: F(ail)

General remarks:

"(see remark #)" refers to a remark appended to the report.

(see appended table)" refers to a table appended to the report.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced except in full without the written approval of the testing laboratory.

Throughout this report a ☐comma/ ☒point is used as the decimal separator.

Summary of testing:

All tests were performed at the worst case and all test results complied with the standard on the cover page.

General product information:

1. The product is Class II AC1200 Dual-Band Wi-Fi Range Extender (Direct plug-in type) which design for audio/video, information and communication technology equipment.
2. The maximum operating temperature is 40°C.
3. Before placing the products in the different countries, the manufacturer must ensure that: Operating Instructions, Ratings Labels and Warnings Labels are in an Accepted or Official Language of the country in question; The equipment complies with the National Standards and/or Electrical Codes of the country, province or city or in question.
4. The EUT of EU plug and UK plug are identical, except the plug is difference, all the tests were performed on the EU plug. If no specified and all the test results also valid for UK plug.
5. All the modes A18 Pro and A18 are identical, just the different model name and A18 is less one gigabit PHY than A18 Pro. All the tests were performed on the model A18 Pro, if no specified and all the test results also valid for the others model.
6. The UK plug complied with BS1363, the details see appended table 4.1.2.
7. The EU plug must be complied with standard EN 50075:1990 when market to the country.
8. The test samples No.: 2V5N-1, 2V5N-2.

OVERVIEW OF ENERGY SOURCES AND SAFEGUARDS				
Clause	Possible Hazard			
5	Electrically-caused injury			
Class and Energy Source (e.g. ES3: Primary circuit)	Body Part (e.g. Ordinary)	Safeguards		
		B	S	R
ES3: Primary circuits	Ordinary	--	--	Enclosure, transformer, distance comply 5.4.2&5.4.3; dielectric strength test 5.4.9, solid insulation 5.4.4.
ES1: Secondary circuits, Accessible enclosure	Ordinary	--	--	--
6	Electrically-caused fire			
Class and Energy Source (e.g. PS2: 100 Watt circuit)	Material part (e.g. Printed board)	Safeguards		
		B	1 st S	2 nd S
PS3: Primary circuits	Enclosure and PCB	See clause 6.3	See clause 6.4.6	--
PS2: J2 port output	Enclosure and PCB	See clause 6.3	See clause 6.4.5	--
7	Injury caused by hazardous substances			
Class and Energy Source (e.g. Ozone)	Body Part (e.g., Skilled)	Safeguards		
		B	S	R
--	--	--	--	--
8	Mechanically-caused injury			
Class and Energy Source (e.g. MS3: Plastic fan blades)	Body Part (e.g. Ordinary)	Safeguards		
		B	S	R
MS1: Sharp edges and corners	Ordinary	--	--	--
MS1: Equipment mass < 7kg	Ordinary	--	--	--
9	Thermal burn			
Class and Energy Source (e.g. TS1: Keyboard caps)	Body Part (e.g., Ordinary)	Safeguards		
		B	S	R
TS1: Accessible parts surface	Ordinary	--	--	--
--	--	--	--	--
10	Radiation			
Class and Energy Source	Body Part	Safeguards		

(e.g. RS1: PMP sound output)	(e.g., Ordinary)	B	S	R
RS1: Indicating light	Ordinary	--	--	--
Supplementary Information: “B” – Basic Safeguard; “S” – Supplementary Safeguard; “R” – Reinforced Safeguard				

ENERGY SOURCE DIAGRAM

Optional. Manufacturers are to provide the energy sources diagram identify declared energy sources and identifying the demarcations are between power sources. Recommend diagram be provided included in power supply and multipart systems.

Insert diagram below. Example diagram designs are; Block diagrams; image(s) with layered data; mechanical drawings

ES3, PS3, MS1, TS1 and RS1 for EUT

☒ ES ☒ PS ☒ MS ☒ TS ☒ RS

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
4	GENERAL REQUIREMENTS		P
4.1.1	Acceptance of materials, components and subassemblies	(See appended table 4.1.2)	P
4.1.2	Use of components	Components comply with the requirements of this standard or, where specified in a requirements clause, with the safety aspects of the relevant IEC component standards. (See appended table 4.1.2)	P
4.1.3	Equipment design and construction	Parts of equipment that could cause injury shall not be accessible, and accessible parts shall not cause an injury.	P
4.1.4	Specified ambient temperature for outdoor use (°C)	Indoor use	N/A
4.1.5	Constructions and components not specifically covered		N/A
4.1.8	Liquids and liquid filled components (LFC)	No such components	N/A
4.1.15	Markings and instructions	(See Annex F)	P
4.4.3	Safeguard robustness		P
4.4.3.1	General	See below	P
4.4.3.2	Steady force tests	(See Annex T.4 and T.2)	P
4.4.3.3	Drop tests	(See Annex T.7)	P
4.4.3.4	Impact tests		N/A
4.4.3.5	Internal accessible safeguard tests		N/A
4.4.3.6	Glass impact tests		N/A
4.4.3.7	Glass fixation tests		N/A
	Glass impact test (1J)		N/A
	Push/pull test (10 N)		N/A
4.4.3.8	Thermoplastic material tests	After 7 hours and cooling down to room temperature, no shrinkage, distortion or loosening any enclosure part was noticeable on the EUT. Test was performed for all sources of enclosure material, detail see Annex T.8.	P
4.4.3.9	Air comprising a safeguard	(See Annex T)	P
4.4.3.10	Accessibility, glass, safeguard effectiveness	Complied.	P
4.4.4	Displacement of a safeguard by an insulating		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	liquid		
4.4.5	Safety interlocks		N/A
4.5	Explosion		P
4.5.1	General	See below.	P
4.5.2	No explosion during normal/abnormal operating condition	Tests as specified in Clause B.2,B.3	P
	No harm by explosion during single fault conditions	Tests as specified in Clause B.4	P
4.6	Fixing of conductors		P
	Fix conductors not to defeat a safeguard		P
	Compliance is checked by test :	Internal conductor and components. See appended table T.2	P
4.7	Equipment for direct insertion into mains socket-outlets		P
4.7.2	Mains plug part complies with relevant standard :	See appended table 4.1.2	P
4.7.3	Torque (Nm) :	EU plug: Max. 0.086Nm UK plug: Max. 0.088Nm	P
4.8	Equipment containing coin/button cell batteries		N/A
4.8.1	General	No button battery	N/A
4.8.2	Instructional safeguard :		N/A
4.8.3	Battery compartment door/cover construction		N/A
	Open torque test		N/A
4.8.4.2	Stress relief test		N/A
4.8.4.3	Battery replacement test		N/A
4.8.4.4	Drop test		N/A
4.8.4.5	Impact test		N/A
4.8.4.6	Crush test		N/A
4.8.5	Compliance		N/A
	30N force test with test probe		N/A
	20N force test with test hook		N/A
4.9	Likelihood of fire or shock due to entry of conductive object		P
4.10	Component requirements		P
4.10.1	Disconnect Device	See clause Annex L	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.10.2	Switches and relays	No such components	N/A
5	Electrically-caused injury		P
5.2	Classification and limits of electrical energy sources		P
5.2.2	ES1, ES2 and ES3 limits	ES3	P
5.2.2.2	Steady-state voltage and current limits :	(See appended table 5.2)	P
5.2.2.3	Capacitance limits :		N/A
5.2.2.4	Single pulse limits :	No such single pulses generated in the EUT or applied to it.	N/A
5.2.2.5	Limits for repetitive pulses :	No such repetitive pulses within the EUT.	N/A
5.2.2.6	Ringling signals	No ringling signals.	N/A
5.2.2.7	Audio signals	No audio signals.	N/A
5.3	Protection against electrical energy sources		P
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons	See only 4.3 and 5.3 to 5.5 which applies to protection between the accessible parts and hazardous parts of other circuits.	P
5.3.1 a)	Accessible ES1/ES2 derived from ES2/ES3 circuits		P
5.3.1 b)	Skilled persons not unintentional contact ES3 bare conductors		N/A
5.3.2.1	Accessibility to electrical energy sources and safeguards	Only ES1 circuit can be accessed for this product.	P
	Accessibility to outdoor equipment bare parts		N/A
5.3.2.2	Contact requirements		P
	Test with test probe from Annex V	No access with test probe to any ES3 circuit or parts.	--
5.3.2.2 a)	Air gap – electric strength test potential (V) :		N/A
5.3.2.2 b)	Air gap – distance (mm) :	Max. Peak 576V, the distance >0.2mm	P
5.3.2.3	Compliance		P
5.3.2.4	Terminals for connecting stripped wire		N/A
5.4	Insulation materials and requirements		P
5.4.1.2	Properties of insulating material	The choice and application have taken into account as specified in this Clause 5 and Annex T, and natural rubber, hygroscopic materials or asbestos are not used as insulation.	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.1.3	Material is non-hygroscopic	No hygroscopic material used.	P
5.4.1.4	Maximum operating temperature for insulating materials :	(See appended table 5.4.1.4)	P
5.4.1.5	Pollution degrees :	2	P
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling test		N/A
5.4.1.6	Insulation in transformers with varying dimensions	No such transformers	N/A
5.4.1.7	Insulation in circuits generating starting pulses	No such circuit	N/A
5.4.1.8	Determination of working voltage :	(See appended table 5.4.1.8)	P
5.4.1.9	Insulating surfaces		P
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted	Comply with clause 5.4.1.10.3 and See appended table 4.1.2	P
5.4.1.10.2	Vicat test :	Ball pressure tested.	N/A
5.4.1.10.3	Ball pressure test :	(See appended table 5.4.1.10.3)	P
5.4.2	Clearances	See below	P
5.4.2.1	General requirements	(See appended table 5.4.2)	P
	Clearances in circuits connected to AC Mains, Alternative method	(See appended table 5.4.2 and 5.4.3)	P
5.4.2.2	Procedure 1 for determining clearance		P
	Temporary overvoltage :	2000V _{peak}	—
5.4.2.3	Procedure 2 for determining clearance	(See appended table 5.4.2)	P
5.4.2.3.2.2	a.c. mains transient voltage :	2500V Peak	—
5.4.2.3.2.3	d.c. mains transient voltage :		—
5.4.2.3.2.4	External circuit transient voltage :		—
5.4.2.3.2.5	Transient voltage determined by measurement :		—
5.4.2.4	Determining the adequacy of a clearance using an electric strength test :		N/A
5.4.2.5	Multiplication factors for clearances and test voltages :	Altitude :Less than 2000m Multiplication :1.0	P
5.4.2.6	Clearance measurement :	(See appended table 5.4.2 and 5.4.3)	P
5.4.3	Creepage distances	(See appended table 5.4.2 and 5.4.3)	P
5.4.3.1	General		P
5.4.3.3	Material group :	Material group IIIb is assumed to be used	—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.3.4	Creepage distances measurement :		P
5.4.4	Solid insulation		P
5.4.4.1	General requirements		P
5.4.4.2	Minimum distance through insulation :	(See appended table 5.4.4.2)	P
5.4.4.3	Insulating compound forming solid insulation		N/A
5.4.4.4	Solid insulation in semiconductor devices		N/A
5.4.4.5	Insulating compound forming cemented joints		N/A
5.4.4.6	Thin sheet material		P
5.4.4.6.1	General requirements		P
5.4.4.6.2	Separable thin sheet material	Separable thin sheet material used.	P
	Number of layers (pcs) :	Min. 2 layers. Any one layer pass the electric strength test for reinforced insulation. See appended table 5.4.9	P
5.4.4.6.3	Non-separable thin sheet material		N/A
	Number of layers (pcs) :		N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material :		N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components		N/A
5.4.4.9	Solid insulation at frequencies >30 kHz, E_P , K_R , d , V_{PW} (V) :		N/A
	Alternative by electric strength test, tested voltage (V), K_R :		N/A
5.4.5	Antenna terminal insulation		N/A
5.4.5.1	General		N/A
5.4.5.2	Voltage surge test		N/A
5.4.5.3	Insulation resistance ($M\Omega$) :		N/A
	Electric strength test :		N/A
5.4.6	Insulation of internal wire as part of supplementary safeguard		N/A
5.4.7	Tests for semiconductor components and for cemented joints		N/A
5.4.8	Humidity conditioning	Humidity treatment performed for 120 hrs. Electric strength test was conducted after the humidity treatment. No break down.	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Relative humidity (%), temperature (°C), duration (h) :	93%,40°C, 120h	—
5.4.9	Electric strength test	(See appended table 5.4.9)	P
5.4.9.1	Test procedure for type test of solid insulation :	Test voltage based on transient voltages.	P
5.4.9.2	Test procedure for routine test		N/A
5.4.10	Safeguards against transient voltages from external circuits		N/A
5.4.10.1	Parts and circuits separated from external circuits		N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test :		N/A
5.4.10.2.3	Steady-state test :		N/A
5.4.10.3	Verification for insulation breakdown for impulse test :		N/A
5.4.11	Separation between external circuits and earth		N/A
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	SPDs bridge separation between external circuit and earth		N/A
	Rated operating voltage U_{op} (V) :		—
	Nominal voltage U_{peak} (V) :		—
	Max increase due to variation ΔU_{sp} :		—
	Max increase due to ageing ΔU_{sa} :		—
5.4.11.3	Test method and compliance :		N/A
5.4.12	Insulating liquid		N/A
5.4.12.1	General requirements		N/A
5.4.12.2	Electric strength of an insulating liquid :		N/A
5.4.12.3	Compatibility of an insulating liquid :		N/A
5.4.12.4	Container for insulating liquid :		N/A
5.5	Components as safeguards		P
5.5.1	General		N/A
5.5.2	Capacitors and RC units		N/A
5.5.2.1	General requirement		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector :		N/A
5.5.3	Transformers	See clause G.5	P
5.5.4	Optocouplers		N/A
5.5.5	Relays		N/A
5.5.6	Resistors		N/A
5.5.7	SPDs		N/A
5.5.8	Insulation between the mains and an external circuit consisting of a coaxial cable :		N/A
5.5.9	Safeguards for socket-outlets in outdoor equipment		N/A
	RCD rated residual operating current (mA) :		—
5.6	Protective conductor		N/A
5.6.2	Requirement for protective conductors		N/A
5.6.2.1	General requirements		N/A
5.6.2.2	Colour of insulation		N/A
5.6.3	Requirement for protective earthing conductors		N/A
	Protective earthing conductor size (mm ²) :		—
	Protective earthing conductor serving as a reinforced safeguard		N/A
	Protective earthing conductor serving as a double safeguard		N/A
5.6.4	Requirements for protective bonding conductors		N/A
5.6.4.1	Protective bonding conductors		N/A
	Protective bonding conductor size (mm ²). :		—
5.6.4.2	Protective current rating (A) :		N/A
5.6.5	Terminals for protective conductors		N/A
5.6.5.1	Terminal size for connecting protective earthing conductors (mm) :		N/A
	Terminal size for connecting protective bonding conductors (mm) :		N/A
5.6.5.2	Corrosion		N/A
5.6.6	Resistance of the protective bonding system		N/A
5.6.6.1	Requirements		N/A
5.6.6.2	Test Method :		N/A
5.6.6.3	Resistance (Ω) or voltage drop :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.6.7	Reliable connection of a protective earthing conductor		N/A
5.6.8	Functional earthing		N/A
	Conductor size (mm ²) :		N/A
	Class II with functional earthing marking :		N/A
	Appliance inlet cl & cr (mm) :		N/A
5.7	Prospective touch voltage, touch current and protective conductor current		P
5.7.2	Measuring devices and networks		P
5.7.2.1	Measurement of touch current	(See appended table 5.2.2)	P
5.7.2.2	Measurement of voltage	(See appended table 5.2.2)	P
5.7.3	Equipment set-up, supply connections and earth connections		N/A
5.7.4	Unearthed accessible parts :	(See appended table 5.7.4)	P
5.7.5	Earthed accessible conductive parts :		N/A
5.7.6	Requirements when touch current exceeds ES2 limits		N/A
	Protective conductor current (mA) :		N/A
	Instructional Safeguard :		N/A
5.7.7	Prospective touch voltage and touch current associated with external circuits		N/A
5.7.7.1	Touch current from coaxial cables		N/A
5.7.7.2	Prospective touch voltage and touch current associated with paired conductor cables		N/A
5.7.8	Summation of touch currents from external circuits		N/A
	a) Equipment connected to earthed external circuits, current (mA) :		N/A
	b) Equipment connected to unearthed external circuits, current (mA) :		N/A
5.8	Backfeed safeguard in battery backed up supplies		N/A
	Mains terminal ES :		N/A
	Air gap (mm) :		N/A

6	Electrically- caused fire		P
6.2	Classification of PS and PIS		P
6.2.2	Power source circuit classifications :	PS3	P
6.2.3	Classification of potential ignition sources	See below	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.2.3.1	Arcing PIS :	(See appended table 6.2.3.1)	P
6.2.3.2	Resistive PIS :	(See appended table 6.2.3.2)	P
6.3	Safeguards against fire under normal operating and abnormal operating conditions		P
6.3.1	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials :	No ignition, no temperature more than 300 °C	P
	Combustible materials outside fire enclosure :	No such material	N/A
6.4	Safeguards against fire under single fault conditions		P
6.4.1	Safeguard method	Method by control of fire spread applied.	P
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits		N/A
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits	Method by control of fire spread applied as 6.4.1	N/A
6.4.3.1	Supplementary safeguards		N/A
6.4.3.2	Single Fault Conditions :		N/A
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits		N/A
6.4.5	Control of fire spread in PS2 circuits		N/A
6.4.5.2	Supplementary safeguards		N/A
6.4.6	Control of fire spread in PS3 circuits	V-0 or better plastic enclosure and Min. V-1 PCB used.	P
6.4.7	Separation of combustible materials from a PIS		N/A
6.4.7.2	Separation by distance		N/A
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers	See below	P
6.4.8.2	Fire enclosure and fire barrier material properties	V-0 plastic enclosure is used for the fire enclosure.	P
6.4.8.2.1	Requirements for a fire barrier		N/A
6.4.8.2.2	Requirements for a fire enclosure	V-0 plastic enclosure is used for the fire enclosure.	P
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier	See below.	P
6.4.8.3.1	Fire enclosure and fire barrier openings	See below	P
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top openings and properties		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Openings dimensions (mm) :	The size of openings not exceed 1mm in width regardless of length. (Breadth: Max.0.9mm)	P
6.4.8.3.4	Bottom openings and properties		P
	Openings dimensions (mm) :	The size of openings not exceed 1mm in width regardless of length. (Breadth: Max.0.9mm)	P
	Flammability tests for the bottom of a fire enclosure		N/A
	Instructional Safeguard :		N/A
6.4.8.3.5	Side openings and properties		P
	Openings dimensions (mm) :	The size of openings not exceed 1mm in width regardless of length. (Breadth: Max.0.9mm)	P
6.4.8.3.6	Integrity of a fire enclosure, condition met: a), b) or c) :		N/A
6.4.8.4	Separation of a PIS from a fire enclosure and a fire barrier distance (mm) or flammability rating :	Fire enclosure is used V-0 plastic enclosure.	P
6.4.9	Flammability of insulating liquid :		N/A
6.5	Internal and external wiring		P
6.5.1	General requirements		P
6.5.2	Requirements for interconnection to building wiring :		N/A
6.5.3	Internal wiring size (mm ²) for socket-outlets :		N/A
6.6	Safeguards against fire due to the connection to additional equipment		N/A

7	INJURY CAUSED BY HAZARDOUS SUBSTANCES	N/A
7.2	Reduction of exposure to hazardous substances	N/A
7.3	Ozone exposure	N/A
7.4	Use of personal safeguards or personal protective equipment (PPE)	N/A
	Personal safeguards and instructions :	—
7.5	Use of instructional safeguards and instructions	N/A
	Instructional safeguard (ISO 7010) :	—
7.6	Batteries and their protection circuits	N/A

8	MECHANICALLY-CAUSED INJURY	P
8.2	Mechanical energy source classifications	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.3	Safeguards against mechanical energy sources		N/A
8.4	Safeguards against parts with sharp edges and corners		N/A
8.4.1	Safeguards	Only MS1, no sharp edges and corners.	N/A
	Instructional Safeguard :		N/A
8.4.2	Sharp edges or corners		N/A
8.5	Safeguards against moving parts		N/A
8.5.1	Fingers, jewellery, clothing, hair, etc., contact with MS2 or MS3 parts		N/A
	MS2 or MS3 part required to be accessible for the function of the equipment		N/A
	Moving MS3 parts only accessible to skilled person		N/A
8.5.2	Instructional safeguard :		N/A
8.5.4	Special categories of equipment containing moving parts		N/A
8.5.4.1	General		N/A
8.5.4.2	Equipment containing work cells with MS3 parts		N/A
8.5.4.2.1	Protection of persons in the work cell		N/A
8.5.4.2.2	Access protection override		N/A
8.5.4.2.2.1	Override system		N/A
8.5.4.2.2.2	Visual indicator		N/A
8.5.4.2.3	Emergency stop system		N/A
	Maximum stopping distance from the point of activation (m) :		N/A
	Space between end point and nearest fixed mechanical part (mm) :		N/A
8.5.4.2.4	Endurance requirements		N/A
	Mechanical system subjected to 100 000 cycles of operation		N/A
	- Mechanical function check and visual inspection		N/A
	- Cable assembly :		N/A
8.5.4.3	Equipment having electromechanical device for destruction of media		N/A
8.5.4.3.1	Equipment safeguards		N/A
8.5.4.3.2	Instructional safeguards against moving parts :		N/A
8.5.4.3.3	Disconnection from the supply		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.5.4.3.4	Cut type and test force (N) :		N/A
8.5.4.3.5	Compliance		N/A
8.5.5	High pressure lamps	No high pressure lamps	N/A
	Explosion test :		N/A
8.5.5.3	Glass particles dimensions (mm) :		N/A
8.6	Stability of equipment		N/A
8.6.1	General	Equipment mass < 7kg, MS1	N/A
	Instructional safeguard :		N/A
8.6.2	Static stability		N/A
8.6.2.2	Static stability test :		N/A
8.6.2.3	Downward force test		N/A
8.6.3	Relocation stability		N/A
	Wheels diameter (mm) :		—
	Tilt test		N/A
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test :		N/A
8.7	Equipment mounted to wall, ceiling or other structure		N/A
8.7.1	Mount means type :		N/A
8.7.2	Test methods		N/A
	Test 1, additional downwards force (N) :		N/A
	Test 2, number of attachment points and test force (N) :		N/A
	Test 3 Nominal diameter (mm) and applied torque (Nm) :		N/A
8.8	Handles strength		N/A
8.8.1	General		N/A
8.8.2	Handle strength test		N/A
	Number of handles :		—
	Force applied (N) :		—
8.9	Wheels or casters attachment requirements		N/A
8.9.2	Pull test		N/A
8.10	Carts, stands and similar carriers		N/A
8.10.1	General		N/A
8.10.2	Marking and instructions :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.10.3	Cart, stand or carrier loading test		N/A
	Loading force applied (N) :		N/A
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Force applied (N) :		—
8.10.6	Thermoplastic temperature stability		N/A
8.11	Mounting means for slide-rail mounted equipment (SRME)		N/A
8.11.1	General		N/A
8.11.2	Requirements for slide rails		N/A
	Instructional Safeguard :		N/A
8.11.3	Mechanical strength test		N/A
8.11.3.1	Downward force test, force (N) applied :		N/A
8.11.3.2	Lateral push force test		N/A
8.11.3.3	Integrity of slide rail end stops		N/A
8.11.4	Compliance		N/A
8.12	Telescoping or rod antennas		N/A
	Button/ball diameter (mm) :		—
9	Thermal burn injury		P
9.2	Thermal energy source classifications		P
9.3	Touch temperature limits		P
9.3.1	Touch temperatures of accessible parts :	(See appended table 9.3)	P
9.3.2	Test method and compliance		P
9.4	Safeguards against thermal energy sources		N/A
9.5	Requirements for safeguards		N/A
9.5.1	Equipment safeguard		N/A
9.5.2	Instructional safeguard :		N/A
9.6	Requirements for wireless power transmitters		N/A
9.6.1	General		N/A
9.6.2	Specification of the foreign objects		N/A
9.6.3	Test method and compliance :		N/A
10	RADIATION		P
10.2	Radiation energy source classification		P


IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.2.1	General classification	Indicator light classified as RS1	P
	Lasers :		—
	Lamps and lamp systems :		—
	Image projectors :		—
	X-Ray :		—
	Personal music player :		—
10.3	Safeguards against laser radiation		N/A
	The standard(s) equipment containing laser(s) comply :		N/A
10.4	Safeguards against optical radiation from lamps and lamp systems (including LED types)		N/A
10.4.1	General requirements		N/A
	Instructional safeguard provided for accessible radiation level needs to exceed		N/A
	Risk group marking and location:		N/A
	Information for safe operation and installation		N/A
10.4.2	Requirements for enclosures		N/A
	UV radiation exposure :		N/A
10.4.3	Instructional safeguard :		N/A
10.5	Safeguards against X-radiation		N/A
10.5.1	Requirements		N/A
	Instructional safeguard for skilled persons :		—
10.5.3	Maximum radiation (pA/kg) :		—
10.6	Safeguards against acoustic energy sources		N/A
10.6.1	General		N/A
10.6.2	Classification		N/A
	Acoustic output $L_{Aeq,T}$, dB(A) :		N/A
	Unweighted RMS output voltage (mV) :		N/A
	Digital output signal (dBFS) :		N/A
10.6.3	Requirements for dose-based systems		N/A
10.6.3.1	General requirements		N/A
10.6.3.2	Dose-based warning and automatic decrease		N/A
10.6.3.3	Exposure-based warning and requirements		N/A
	30 s integrated exposure level (MEL30) :		N/A
	Warning for MEL ≥ 100 dB(A) :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.6.4	Measurement methods		N/A
10.6.5	Protection of persons		N/A
	Instructional safeguards :		N/A
10.6.6	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.6.1	Corded listening devices with analogue input		N/A
	Listening device input voltage (mV) :		N/A
10.6.6.2	Corded listening devices with digital input		N/A
	Max. acoustic output $L_{Aeq,T}$, dB(A) :		N/A
10.6.6.3	Cordless listening devices		N/A
	Max. acoustic output $L_{Aeq,T}$, dB(A) :		N/A

B	NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS		P
B.1	General		P
B.1.5	Temperature measurement conditions		P
B.2	Normal operating conditions		P
B.2.1	General requirements :	(See Test Item Particulars and appended test tables)	P
	Audio Amplifiers and equipment with audio amplifiers :		N/A
B.2.3	Supply voltage and tolerances	100-240V~ ,±10%	P
B.2.5	Input test :	(See appended table B.2.5)	P
B.3	Simulated abnormal operating conditions		P
B.3.1	General		P
B.3.2	Covering of ventilation openings	(See appended table B.3)	P
	Instructional safeguard :		N/A
B.3.3	DC mains polarity test	Not connected to D.C. mains	N/A
B.3.4	Setting of voltage selector	No such components	N/A
B.3.5	Maximum load at output terminals	No such terminals	N/A
B.3.6	Reverse battery polarity		N/A
B.3.7	Audio amplifier abnormal operating conditions		N/A
B.3.8	Safeguards functional during and after abnormal operating conditions :	(See appended table B.3)	P
B.4	Simulated single fault conditions		P
B.4.1	General		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.4.2	Temperature controlling device	No such components	N/A
B.4.3	Blocked motor test		N/A
B.4.4	Functional insulation		P
B.4.4.1	Short circuit of clearances for functional insulation	The functional insulation was short-circuited. (See appended table B.4)	P
B.4.4.2	Short circuit of creepage distances for functional insulation	The functional insulation was short-circuited. (See appended table B.4)	P
B.4.4.3	Short circuit of functional insulation on coated printed boards		N/A
B.4.5	Short-circuit and interruption of electrodes in tubes and semiconductors		N/A
B.4.6	Short circuit or disconnection of passive components	(See appended table B.4)	P
B.4.7	Continuous operation of components		N/A
B.4.8	Compliance during and after single fault conditions :	(See appended table B.4)	P
B.4.9	Battery charging and discharging under single fault conditions		N/A
C	UV RADIATION		N/A
C.1	Protection of materials in equipment from UV radiation		N/A
C.1.2	Requirements	No UV radiation	N/A
C.1.3	Test method		N/A
C.2	UV light conditioning test		N/A
C.2.1	Test apparatus :		N/A
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure test		N/A
C.2.4	Xenon-arc light-exposure test		N/A
D	TEST GENERATORS		N/A
D.1	Impulse test generators		N/A
D.2	Antenna interface test generator		N/A
D.3	Electronic pulse generator		N/A
E	TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS		N/A
E.1	Electrical energy source classification for audio signals		N/A
	Maximum non-clipped output power (W) :	No such components.	—

IEC 62368-1			
Clause	Requirement + Test		Verdict
	Rated load impedance (Ω) :		—
	Open-circuit output voltage (V) :		—
	Instructional safeguard :		—
E.2	Audio amplifier normal operating conditions		N/A
	Audio signal source type :	No such components.	—
	Audio output power (W) :		—
	Audio output voltage (V):		—
	Rated load impedance (Ω) :		—
	Requirements for temperature measurement		N/A
E.3	Audio amplifier abnormal operating conditions		N/A
F	EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS		P
F.1	General		P
	Language :	English version evaluated	—
F.2	Letter symbols and graphical symbols		P
F.2.1	Letter symbols according to IEC60027-1	Used letter symbols according to IEC 60027-1 in label and user manual	P
F.2.2	Graphic symbols according to IEC, ISO or manufacturer specific	Complied	P
F.3	Equipment markings		P
F.3.1	Equipment marking locations	The required marking is located on the external enclosure of the equipment	P
F.3.2	Equipment identification markings	See below	P
F.3.2.1	Manufacturer identification :	See copy of marking plate	P
F.3.2.2	Model identification :	See copy of marking plate	P
F.3.3	Equipment rating markings	See below	P
F.3.3.1	Equipment with direct connection to mains	Directly connected to the AC mains	P
F.3.3.2	Equipment without direct connection to mains		N/A
F.3.3.3	Nature of the supply voltage :	~	P
F.3.3.4	Rated voltage :	100-240V	P
F.3.3.5	Rated frequency :	50/60Hz	P
F.3.3.6	Rated current or rated power :	0.4A	P
F.3.3.7	Equipment with multiple supply connections		N/A
F.3.4	Voltage setting device	No voltage setting device	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.5	Terminals and operating devices		P
F.3.5.1	Mains appliance outlet and socket-outlet markings :		N/A
F.3.5.2	Switch position identification marking :		N/A
F.3.5.3	Replacement fuse identification and rating markings :	"F1, 3.3R 2WS or 5.1R 2WS or 6.8R 2WS" mark on PCB near F1.	P
	Instructional safeguards for neutral fuse :		N/A
F.3.5.4	Replacement battery identification marking :		N/A
F.3.5.5	Neutral conductor terminal		N/A
F.3.5.6	Terminal marking location		N/A
F.3.6	Equipment markings related to equipment classification	Class II equipment.	P
F.3.6.1	Class I equipment		N/A
F.3.6.1.1	Protective earthing conductor terminal :		N/A
F.3.6.1.2	Protective bonding conductor terminals :		N/A
F.3.6.2	Equipment class marking :	 Marked on the EUT	P
F.3.6.3	Functional earthing terminal marking :		N/A
F.3.7	Equipment IP rating marking :	IPX0	N/A
F.3.8	External power supply output marking :		N/A
F.3.9	Durability, legibility and permanence of marking	The markings on the equipment is durable and legible, and shall be easily discernable under normal lighting conditions	P
F.3.10	Test for permanence of markings	Rubbing the marking by hand for 15 s with piece of cloth soaked with water and, at a different place for on a second sample. For 15 s with a piece of cloth soaked with petroleum spirit .after this test, marking is legible and cannot be easily possible to remove marking and show no curling	P
F.4	Instructions		P
	a) Information prior to installation and initial use		P
	b) Equipment for use in locations where children not likely to be present		N/A
	c) Instructions for installation and interconnection		P
	d) Equipment intended for use only in restricted		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	access area		
	e) Equipment intended to be fastened in place		N/A
	f) Instructions for audio equipment terminals		N/A
	g) Protective earthing used as a safeguard		N/A
	h) Protective conductor current exceeding ES2 limits		N/A
	i) Graphic symbols used on equipment		P
	j) Permanently connected equipment not provided with all-pole mains switch		N/A
	k) Replaceable components or modules providing safeguard function		N/A
	l) Equipment containing insulating liquid		N/A
	m) Installation instructions for outdoor equipment		N/A
F.5	Instructional safeguards		P
G	COMPONENTS		P
G.1	Switches		N/A
G.1.1	General	No such components	N/A
G.1.2	Ratings, endurance, spacing, maximum load		N/A
G.1.3	Test method and compliance		N/A
G.2	Relays		N/A
G.2.1	Requirements	No such components	N/A
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supplying power to other equipment		N/A
G.2.4	Test method and compliance		N/A
G.3	Protective devices		P
G.3.1	Thermal cut-offs		N/A
	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A
	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Test method and compliance		N/A
G.3.2	Thermal links		N/A
G.3.2.1	a) Thermal links tested separately according to IEC 60691 with specifics		N/A
	b) Thermal links tested as part of the equipment		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.3.2.2	Test method and compliance		N/A
G.3.3	PTC thermistors		N/A
G.3.4	Overcurrent protection devices		N/A
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.4		P
G.3.5.1	Non-resettable devices suitably rated and marking provided		P
G.3.5.2	Single faults conditions :	(See appended table B.4)	P
G.4	Connectors		N/A
G.4.1	Spacings	No such components	N/A
G.4.2	Mains connector configuration :		N/A
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely		N/A
G.5	Wound components		P
G.5.1	Wire insulation in wound components	Approved Triple insulation wires (TIW) used for secondary winding of transformer.	P
G.5.1.2	Protection against mechanical stress	Physical separation is provided.	P
G.5.2	Endurance test		N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Test time (days per cycle) :		—
	Test temperature (°C) :		—
G.5.2.3	Wound components supplied from the mains		N/A
G.5.2.4	No insulation breakdown		N/A
G.5.3	Transformers		P
G.5.3.1	Compliance method :	Comply with the requirements as below	P
	Position:	T1	P
	Method of protection :	See G.5.3.3	P
G.5.3.2	Insulation	Primary windings and secondary windings are separated by Reinforced insulation. (The core is considered as primary part as it is not isolated from Primary)	P
	Protection from displacement of windings :	Fixed by bobbin and insulation tape	—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.5.3.3	Transformer overload tests	See below	P
G.5.3.3.1	Test conditions	(See append table B.3 and B.4)	P
G.5.3.3.2	Winding temperatures	(See append table B.3 and B.4)	P
G.5.3.3.3	Winding temperatures - alternative test method		N/A
G.5.3.4	Transformers using FIW		N/A
G.5.3.4.1	General		N/A
	FIW wire nominal diameter :		—
G.5.3.4.2	Transformers with basic insulation only		N/A
G.5.3.4.3	Transformers with double insulation or reinforced insulation :		N/A
G.5.3.4.4	Transformers with FIW wound on metal or ferrite core		N/A
G.5.3.4.5	Thermal cycling test and compliance		N/A
G.5.3.4.6	Partial discharge test		N/A
G.5.3.4.7	Routine test		N/A
G.5.4	Motors		N/A
G.5.4.1	General requirements		N/A
G.5.4.2	Motor overload test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4.2	Locked-rotor overload test		N/A
	Test duration (days) :		—
G.5.4.5	Running overload test for DC motors		N/A
G.5.4.5.2	Tested in the unit		N/A
G.5.4.5.3	Alternative method		N/A
G.5.4.6	Locked-rotor overload test for DC motors		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature :		N/A
G.5.4.6.3	Alternative method		N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage :		—
G.6	Wire Insulation		P
G.6.1	General	Triple insulated winding in T1 secondary windings used as	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
		reinforced safeguard in the isolating transformer that has separately complied with Annex J.	
G.6.2	Enamelled winding wire insulation		P
G.7	Mains supply cords		N/A
G.7.1	General requirements	Direct plug-in product.	N/A
	Type :		—
G.7.2	Cross sectional area (mm ² or AWG) :		N/A
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N) :		N/A
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm) :		N/A
G.7.3.2.4	Strain relief and cord anchorage material		N/A
G.7.4	Cord Entry		N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Test method and compliance		N/A
	Overall diameter or minor overall dimension, <i>D</i> (mm) :		—
	Radius of curvature after test (mm) :		—
G.7.6	Supply wiring space		N/A
G.7.6.1	General requirements		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Requirements		N/A
G.7.6.2.2	Test with 8 mm strand		N/A
G.8	Varistors		N/A
G.8.1	General requirements	No such components	N/A
G.8.2	Safeguards against fire		N/A
G.8.2.1	General		N/A
G.8.2.2	Varistor overload test		N/A
G.8.2.3	Temporary overvoltage test		N/A
G.9	Integrated circuit (IC) current limiters		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.9.1	Requirements	No such components	N/A
	IC limiter output current (max. 5A) :		—
	Manufacturers' defined drift :		—
G.9.2	Test Program		N/A
G.9.3	Compliance		N/A
G.10	Resistors		N/A
G.10.1	General		N/A
G.10.2	Conditioning		N/A
G.10.3	Resistor test		N/A
G.10.4	Voltage surge test		N/A
G.10.5	Impulse test		N/A
G.10.6	Overload test		N/A
G.11	Capacitors and RC units		N/A
G.11.1	General requirements	No such components	N/A
G.11.2	Conditioning of capacitors and RC units		N/A
G.11.3	Rules for selecting capacitors		N/A
G.12	Optocouplers		N/A
	Optocouplers comply with IEC 60747-5-5 with specifics	No such components	N/A
	Type test voltage $V_{ini,a}$:		—
	Routine test voltage, $V_{ini,b}$:		—
G.13	Printed boards		P
G.13.1	General requirements	(See appended table 4.1.2)	P
G.13.2	Uncoated printed boards		P
G.13.3	Coated printed boards		N/A
G.13.4	Insulation between conductors on the same inner surface		N/A
G.13.5	Insulation between conductors on different surfaces		N/A
	Distance through insulation :		N/A
	Number of insulation layers (pcs) :		—
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2	Test method and compliance		N/A
G.14	Coating on components terminals		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.14.1	Requirements :	No such components	N/A
G.15	Pressurized liquid filled components		N/A
G.15.1	Requirements	No such components	N/A
G.15.2	Test methods and compliance		N/A
G.15.2.1	Hydrostatic pressure test		N/A
G.15.2.2	Creep resistance test		N/A
G.15.2.3	Tubing and fittings compatibility test		N/A
G.15.2.4	Vibration test		N/A
G.15.2.5	Thermal cycling test		N/A
G.15.2.6	Force test		N/A
G.15.3	Compliance		N/A
G.16	IC including capacitor discharge function (ICX)		N/A
G.16.1	Condition for fault tested is not required	No such components	N/A
	ICX with associated circuitry tested in equipment		N/A
	ICX tested separately		N/A
G.16.2	Tests		N/A
	Smallest capacitance and smallest resistance specified by ICX manufacturer for impulse test :		—
	Mains voltage that impulses to be superimposed on :		—
	Largest capacitance and smallest resistance for ICX tested by itself for 10000 cycles test :		—
G.16.3	Capacitor discharge test:		N/A
H	CRITERIA FOR TELEPHONE RINGING SIGNALS		N/A
H.1	General		N/A
H.2	Method A		N/A
H.3	Method B		N/A
H.3.1	Ringing signal	No ringing signals	N/A
H.3.1.1	Frequency (Hz) :		—
H.3.1.2	Voltage (V) :		—
H.3.1.3	Cadence; time (s) and voltage (V) :		—
H.3.1.4	Single fault current (mA): :		—
H.3.2	Tripping device and monitoring voltage		N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A

IEC 62368-1			
Clause	Requirement + Test		Verdict
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V) :		N/A
J	INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION		P
J.1	General		P
	Winding wire insulation :	Approved triple insulated wire used. See appended table 4.1.2.	—
	Solid round winding wire, diameter (mm):		N/A
	Solid square and rectangular (flatwise bending) winding wire, cross-sectional area (mm ²):		N/A
J.2/J.3	Tests and Manufacturing		—
K	SAFETY INTERLOCKS		N/A
K.1	General requirements		N/A
	Instructional safeguard :	No such components	N/A
K.2	Components of safety interlock safeguard mechanism		N/A
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
K.5.1	Under single fault condition		N/A
K.6	Mechanically operated safety interlocks		N/A
K.6.1	Endurance requirement		N/A
K.6.2	Test method and compliance :		N/A
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements		N/A
	In circuit connected to mains, separation distance for contact gaps (mm) :		N/A
	In circuit isolated from mains, separation distance for contact gaps (mm) :		N/A
	Electric strength test before and after the test of K.7.2 :		N/A
K.7.2	Overload test, Current (A) :		N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test		N/A
L	DISCONNECT DEVICES		P
L.1	General requirements	Plug portion used as disconnect device	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
L.2	Permanently connected equipment		N/A
L.3	Parts that remain energized		N/A
L.4	Single-phase equipment	Single phase equipment and the disconnect device disconnect both poles simultaneously.	P
L.5	Three-phase equipment		N/A
L.6	Switches as disconnect devices		N/A
L.7	Plugs as disconnect devices	Plug portion used as disconnect device	P
L.8	Multiple power sources		N/A
	Instructional safeguard :		N/A
M	EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS		N/A
M.1	General requirements		N/A
M.2	Safety of batteries and their cells		N/A
M.2.1	Batteries and their cells comply with relevant IEC standards :		N/A
M.3	Protection circuits for batteries provided within the equipment		N/A
M.3.1	Requirements		N/A
M.3.2	Test method		N/A
	Overcharging of a rechargeable battery		N/A
	Excessive discharging		N/A
	Unintentional charging of a non-rechargeable battery		N/A
	Reverse charging of a rechargeable battery		N/A
M.3.3	Compliance		N/A
M.4	Additional safeguards for equipment containing a portable secondary lithium battery		N/A
M.4.1	General		N/A
M.4.2	Charging safeguards		N/A
M.4.2.1	Requirements		N/A
M.4.2.2	Compliance :		N/A
M.4.3	Fire enclosure :		N/A
M.4.4	Drop test of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation and procedure for the drop test		N/A
M.4.4.3	Drop, Voltage on reference and dropped batteries		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	(V); voltage difference during 24 h period (%):		
M.4.4.4	Check of the charge/discharge function		N/A
M.4.4.5	Charge / discharge cycle test		N/A
M.4.4.6	Compliance		N/A
M.5	Risk of burn due to short-circuit during carrying		N/A
M.5.1	Requirement		N/A
M.5.2	Test method and compliance		N/A
M.6	Safeguards against short-circuits		N/A
M.6.1	External and internal faults		N/A
M.6.2	Compliance		N/A
M.7	Risk of explosion from lead acid and NiCd batteries		N/A
M.7.1	Ventilation preventing explosive gas concentration		N/A
	Calculated hydrogen generation rate		N/A
M.7.2	Test method and compliance		N/A
	Minimum air flow rate, Q (m ³ /h) :		N/A
M.7.3	Ventilation tests		N/A
M.7.3.1	General		N/A
M.7.3.2	Ventilation test – alternative 1		N/A
	Hydrogen gas concentration (%):		N/A
M.7.3.3	Ventilation test – alternative 2		N/A
	Obtained hydrogen generation rate :		N/A
M.7.3.4	Ventilation test – alternative 3		N/A
	Hydrogen gas concentration (%):		N/A
M.7.4	Marking:		N/A
M.8	Protection against internal ignition from external spark sources of batteries with aqueous electrolyte		N/A
M.8.1	General		N/A
M.8.2	Test method		N/A
M.8.2.1	General		N/A
M.8.2.2	Estimation of hypothetical volume V_z (m ³ /s) :		—
M.8.2.3	Correction factors :		—
M.8.2.4	Calculation of distance d (mm) :		—
M.9	Preventing electrolyte spillage		N/A
M.9.1	Protection from electrolyte spillage		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	Instructions to prevent reasonably foreseeable misuse		N/A
	Instructional safeguard :		N/A
N	ELECTROCHEMICAL POTENTIALS		N/A
	Material(s) used:		—
O	MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES		P
	Value of X (mm) :	Considered	—
P	SAFEGUARDS AGAINST CONDUCTIVE OBJECTS		P
P.1	General		P
P.2	Safeguards against entry or consequences of entry of a foreign object		P
P.2.1	General		P
P.2.2	Safeguards against entry of a foreign object	Top openings, bottom openings, side openings.	P
	Location and Dimensions (mm) :	The size of all openings not exceed 1mm in width regardless of length. (Breadth: Max.0.9mm)	—
P.2.3	Safeguards against the consequences of entry of a foreign object		N/A
P.2.3.1	Safeguard requirements		N/A
	The ES3 and PS3 keep-out volume in Figure P.3 not applicable to transportable equipment		N/A
	Transportable equipment with metalized plastic parts :		N/A
P.2.3.2	Consequence of entry test :		N/A
P.3	Safeguards against spillage of internal liquids		N/A
P.3.1	General		N/A
P.3.2	Determination of spillage consequences		N/A
P.3.3	Spillage safeguards		N/A
P.3.4	Compliance		N/A
P.4	Metalized coatings and adhesives securing parts		N/A
P.4.1	General		N/A
P.4.2	Tests		N/A
	Conditioning, T _C (°C) :		—
	Duration (weeks) :		—
Q	CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
Q.1	Limited power sources		N/A
Q.1.1	Requirements		N/A
	a) Inherently limited output		N/A
	b) Impedance limited output		N/A
	c) Regulating network limited output		N/A
	d) Overcurrent protective device limited output		N/A
	e) IC current limiter complying with G.9		N/A
Q.1.2	Test method and compliance :		N/A
	Current rating of overcurrent protective device (A) :		N/A
Q.2	Test for external circuits – paired conductor cable		N/A
	Maximum output current (A) :		N/A
	Current limiting method :		—
R	LIMITED SHORT CIRCUIT TEST		N/A
R.1	General		N/A
R.2	Test setup		N/A
	Overcurrent protective device for test :		—
R.3	Test method		N/A
	Cord/cable used for test :		—
R.4	Compliance		N/A
S	TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
S.1	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material :		—
	Wall thickness (mm) :		—
	Conditioning (°C) :		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrier integrity		N/A
	Samples, material :		—
	Wall thickness (mm) :		—

IEC 62368-1			
Clause	Requirement + Test		Verdict
	Conditioning (°C) :		—
S.3	Flammability test for the bottom of a fire enclosure		N/A
S.3.1	Mounting of samples		N/A
S.3.2	Test method and compliance		N/A
	Mounting of samples :		—
	Wall thickness (mm) :		—
S.4	Flammability classification of materials		N/A
S.5	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power exceeding 4 000 W		N/A
	Samples, material :		—
	Wall thickness (mm) :		—
	Conditioning (°C) :		—
T	MECHANICAL STRENGTH TESTS		P
T.1	General		P
T.2	Steady force test, 10 N :	(See appended table Annex T.2)	P
T.3	Steady force test, 30 N :		N/A
T.4	Steady force test, 100 N :	(See appended table Annex T.4)	P
T.5	Steady force test, 250 N :		N/A
T.6	Enclosure impact test		N/A
	Fall test		N/A
	Swing test		N/A
T.7	Drop test :	(See appended table Annex T.7)	P
T.8	Stress relief test :	(See appended table Annex T.8)	P
T.9	Glass Impact Test :		N/A
T.10	Glass fragmentation test		N/A
	Number of particles counted :		N/A
T.11	Test for telescoping or rod antennas		N/A
	Torque value (Nm) :		N/A
U	MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION		N/A
U.1	General		N/A
	Instructional safeguard :		N/A
U.2	Test method and compliance for non-intrinsically protected CRTs		N/A
U.3	Protective screen		N/A

IEC 62368-1			
Clause	Requirement + Test		Verdict
V	DETERMINATION OF ACCESSIBLE PARTS		P
V.1	Accessible parts of equipment		P
V.1.1	General	Only plastic enclosure can be touched by test probes of Figure V.1 and V.2 No hazards.	P
V.1.2	Surfaces and openings tested with jointed test probes		P
V.1.3	Openings tested with straight unjointed test probes		P
V.1.4	Plugs, jacks, connectors tested with blunt probe		N/A
V.1.5	Slot openings tested with wedge probe		N/A
V.1.6	Terminals tested with rigid test wire		P
V.2	Accessible part criterion		P
X	ALTERNATIVE METHOD FOR DETERMINING CLEARANCES FOR INSULATION IN CIRCUITS CONNECTED TO AN AC MAINS NOT EXCEEDING 420 V PEAK (300 V RMS)		N/A
	Clearance :		N/A
Y	CONSTRUCTION REQUIREMENTS FOR OUTDOOR ENCLOSURES		N/A
Y.1	General		N/A
Y.2	Resistance to UV radiation		N/A
Y.3	Resistance to corrosion		N/A
Y.3.1	Metallic parts of outdoor enclosures are resistant to effects of water-borne contaminants by :		N/A
Y.3.2	Test apparatus		N/A
Y.3.3	Water – saturated sulphur dioxide atmosphere		N/A
Y.3.4	Test procedure :		N/A
Y.3.5	Compliance		N/A
Y.4	Gaskets		N/A
Y.4.1	General		N/A
Y.4.2	Gasket tests		N/A
Y.4.3	Tensile strength and elongation tests		N/A
	Alternative test methods:		N/A
Y.4.4	Compression test		N/A
Y.4.5	Oil resistance		N/A
Y.4.6	Securing means		N/A
Y.5	Protection of equipment within an outdoor enclosure		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
Y.5.1	General		N/A
Y.5.2	Protection from moisture		N/A
	Relevant tests of IEC 60529 or Y.5.3 :		N/A
Y.5.3	Water spray test		N/A
Y.5.4	Protection from plants and vermin		N/A
Y.5.5	Protection from excessive dust		N/A
Y.5.5.1	General		N/A
Y.5.5.2	IP5X equipment		N/A
Y.5.5.3	IP6X equipment		N/A
Y.6	Mechanical strength of enclosures		N/A
Y.6.1	General		N/A
Y.6.2	Impact test :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT

IEC 62368-1

EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES

(AUDIO/VIDEO, INFORMATION AND COMMUNICATION TECHNOLOGY EQUIPMENT - PART 1: SAFETY REQUIREMENTS)

Differences according to: EN IEC 62368-1:2020+A11:2020

Attachment Form No.: EU_GD_IEC62368_1E

Attachment Originator: UL(Demko)

Master Attachment: 2021-02-04

Copyright © 2021 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

	CENELEC COMMON MODIFICATIONS (EN)	P								
	<p>Clause numbers in the cells that are shaded light grey are clause references in EN IEC 62368-1:2020+A11:2020. All other clause numbers in that column, except for those in the paragraph below, refers to IEC 62368-1:2018.</p> <p>Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2018 are prefixed “Z”.</p>	P								
	<p>Add the following annexes:</p> <table><tr><td>Annex ZA (normative)</td><td>Normative references to international publications with their corresponding European publications</td></tr><tr><td>Annex ZB (normative)</td><td>Special national conditions</td></tr><tr><td>Annex ZC (informative)</td><td>A-deviations</td></tr><tr><td>Annex ZD (informative)</td><td>IEC and CENELEC code designations for flexible cords</td></tr></table>	Annex ZA (normative)	Normative references to international publications with their corresponding European publications	Annex ZB (normative)	Special national conditions	Annex ZC (informative)	A-deviations	Annex ZD (informative)	IEC and CENELEC code designations for flexible cords	P
Annex ZA (normative)	Normative references to international publications with their corresponding European publications									
Annex ZB (normative)	Special national conditions									
Annex ZC (informative)	A-deviations									
Annex ZD (informative)	IEC and CENELEC code designations for flexible cords									
1	Modification to Clause 3 .	N/A								
3.3.19	<p>Sound exposure</p> <p><i>Replace 3.3.19 of IEC 62368-1 with the following definitions:</i></p>	N/A								



IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.3.19.1	<p>momentary exposure level, MEL</p> <p>metric for estimating 1 s sound exposure level from the HD 483-1 S2 test signal applied to both channels, based on EN 50332-1:2013, 4.2.</p> <p>Note 1 to entry: MEL is measured as A-weighted levels in dB. Note 2 to entry: See B.3 of EN 50332-3:2017 for additional information.</p>		N/A
3.3.19.3	<p>sound exposure, E</p> <p>A-weighted sound pressure (p) squared and integrated over a stated period of time, T</p> <p>Note 1 to entry: The SI unit is $\text{Pa}^2 \text{ s}$.</p> $E = \int_0^T p(t)^2 dt$		N/A
3.3.19.4	<p>sound exposure level, SEL</p> <p>logarithmic measure of sound exposure relative to a reference value, E_0, typically the 1 kHz threshold of hearing in humans.</p> <p>Note 1 to entry: SEL is measured as A-weighted levels in dB.</p> $SEL = 10 \lg \left(\frac{E}{E_0} \right) \text{ dB}$ <p>Note 2 to entry: See B.4 of EN 50332-3:2017 for additional information.</p>		N/A
3.3.19.5	<p>digital signal level relative to full scale, dBFS</p> <p>levels reported in dBFS are always r.m.s. Full scale level, 0 dBFS, is the level of a dc-free 997-Hz sine wave whose undithered positive peak value is positive digital full scale, leaving the code corresponding to negative digital full scale unused</p> <p>Note 1 to entry: It is invalid to use dBFS for non-r.m.s. levels. Because the definition of full scale is based on a sine wave, the level of signals with a crest factor lower than that of a sine wave may exceed 0 dBFS. In particular, square wave signals may reach +3,01 dBFS.</p>		N/A
2	Modification to Clause 10		N/A
10.6	<p>Safeguards against acoustic energy sources</p> <p>Replace 10.6 of IEC 62368-1 with the following:</p>		N/A
10.6.1.1	<p>Introduction</p> <p>Safeguard requirements for protection against</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>long-term exposure to excessive sound pressure levels from personal music players closely coupled to the ear are specified below. Requirements for earphones and headphones intended for use with personal music players are also covered. A personal music player is a portable equipment intended for use by an ordinary person, that:</p> <ul style="list-style-type: none"> – is designed to allow the user to listen to audio or audiovisual content / material; and – uses a listening device, such as headphones or earphones that can be worn in or on or around the ears; and – has a player that can be body worn (of a size suitable to be carried in a clothing pocket) and is intended for the user to walk around with while in continuous use (for example, on a street, in a subway, at an airport, etc.). <p>EXAMPLES Portable CD players, MP3 audio players, mobile phones with MP3 type features, PDAs or similar equipment.</p> <p>Personal music players shall comply with the requirements of either 10.6.2 or 10.6.3.</p> <p>NOTE 1 Protection against acoustic energy sources from telecom applications is referenced to ITU-T P.360.</p> <p>NOTE 2 It is the intention of the Committee to allow the alternative methods for now, but to only use the dose measurement method as given in 10.6.5 in future. Therefore, manufacturers are encouraged to implement 10.6.5 as soon as possible.</p> <p>Listening devices sold separately shall comply with the requirements of 10.6.6. These requirements are valid for music or video mode only. The requirements do not apply to:</p> <ul style="list-style-type: none"> – professional equipment; <p>NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p> <ul style="list-style-type: none"> – hearing aid equipment and other devices for assistive listening; – the following type of analogue personal music players: <ul style="list-style-type: none"> • long distance radio receiver (for example, a multiband radio receiver or world band radio receiver, an AM radio receiver), and • cassette player/recorder; <p>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that</p>		

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>within a few years it will no longer exist. This exemption will not be extended to other technologies.</p> <p>– a player while connected to an external amplifier that does not allow the user to walk around while in use.</p> <p>For equipment that is clearly designed or intended primarily for use by children, the limits of the relevant toy standards may apply.</p> <p>The relevant requirements are given in EN 71-1:2011, 4.20 and the related tests methods and measurement distances apply.</p>		
10.6.1.2	<p>Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz</p> <p>The amount of non-ionizing radiation is regulated by European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz). For intentional radiators, ICNIRP guidelines should be taken into account for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). For hand-held and body mounted devices, attention is drawn to EN 50360 and EN 50566.</p>		N/A
10.6.2	Classification of devices without the capacity to estimate sound dose		N/A
10.6.2.1	<p>General</p> <p>This standard is transitioning from short-term based (30 s) requirements to long-term based (40 hour) requirements. These clauses remain in effect only for devices that do not comply with sound dose estimation as stipulated in EN 50332-3.</p> <p>For classifying the acoustic output $L_{Aeq,T}$, measurements are based on the A-weighted equivalent sound pressure level over a 30 s period.</p> <p>For music where the average sound pressure (long term $L_{Aeq,T}$) measured over the duration of the song is lower than the average produced by the programme simulation noise, measurements may be done over the duration of the complete song. In this case, T becomes the duration of the song.</p> <p>NOTE Classical music, acoustic music and broadcast typically has an average sound pressure (long term $L_{Aeq,T}$) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the content and compare it with the programme simulation noise, the warning</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	does not need to be given as long as the average sound pressure of the song does not exceed the required limit. For example, if the player is set with the programme simulation noise to 85 dB, but the average music level of the song is only 65 dB, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dB.		
10.6.2.2	<p>RS1 limits (to be superseded, see 10.6.3.2)</p> <p>RS1 is a class 1 acoustic energy source that does not exceed the following:</p> <ul style="list-style-type: none"> – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 85 dB when playing the fixed “programme simulation noise” described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 27 mV (analogue interface) or -25 dBFS (digital interface) when playing the fixed “programme simulation noise” described in EN 50332-1. – The RS1 limits will be updated for all devices as per 10.6.3.2. 		N/A
10.6.2.3	<p>RS2 limits (to be superseded, see 10.6.3.3)</p> <p>RS2 is a class 2 acoustic energy source that does not exceed the following:</p> <ul style="list-style-type: none"> – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or when the combination of player and listening device is known by other means such as setting or automatic 130 detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 100 dB(A) when playing the fixed “programme simulation noise” as described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 150 mV (analogue interface) or -10 dBFS (digital interface) when playing the fixed “programme simulation noise” as described in EN 50332-1. 		N/A
10.6.2.4	<p>RS3 limits</p> <p>RS3 is a class 3 acoustic energy source that exceeds RS2 limits.</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.6.3	Classification of devices (new)		N/A
10.6.3.1	General Previous limits (10.6.2) created abundant false negative and false positive PMP sound level warnings. New limits, compliant with The Commission Decision of 23 June 2009, are given below.		N/A
10.6.3.2	RS1 limits (new) RS1 is a class 1 acoustic energy source that does not exceed the following: – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 80 dB when playing the fixed “programme simulation noise” described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital interface) when playing the fixed “programme simulation noise” described in EN 50332-1.		N/A
10.6.3.3	RS2 limits (new) RS2 is a class 2 acoustic energy source that does not exceed the following: – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the weekly sound exposure level, as described in EN 50332-3, shall be ≤ 80 dB when playing the fixed “programme simulation noise” described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output level, integrated over one week, as described in EN50332-3, shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital interface) when playing the fixed “programme simulation noise” described in EN 50332-1.		N/A
10.6.4	Requirements for maximum sound exposure		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.6.4.1	<p>Measurement methods</p> <p>All volume controls shall be turned to maximum during tests.</p> <p>Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable.</p>		N/A
10.6.4.2	<p>Protection of persons</p> <p>Except as given below, protection requirements for parts accessible to ordinary persons, instructed persons and skilled persons are given in 4.3.</p> <p>NOTE 1 Volume control is not considered a safeguard.</p> <p>Between RS2 and an ordinary person, the basic safeguard may be replaced by an instructional safeguard in accordance with Clause F.5, except that the instructional safeguard shall be placed on the equipment, or on the packaging, or in the instruction manual.</p> <p>Alternatively, the instructional safeguard may be given through the equipment display during use.</p> <p>The elements of the instructional safeguard shall be as follows:</p> <div style="text-align: center;">  </div> <ul style="list-style-type: none"> – element 1a: the symbol , IEC 60417-6044 (2011-01) – element 2: “High sound pressure” or equivalent wording – element 3: “Hearing damage risk” or equivalent wording – element 4: “Do not listen at high volume levels for long periods.” or equivalent wording <p>An equipment safeguard shall prevent exposure of an ordinary person to an RS2 source without intentional physical action from the ordinary person and shall automatically return to an output level not exceeding what is specified for an RS1 source when the power is switched off.</p> <p>The equipment shall provide a means to actively inform the user of the increased sound level when the equipment is operated with an output exceeding RS1. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an output exceeding RS1. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time.</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always needed.</p> <p>NOTE 3 The 20 h listening time is the accumulative listening time, independent of how often and how long the personal music player has been switched off.</p> <p>A skilled person shall not be unintentionally exposed to RS3.</p>		
10.6.5	Requirements for dose-based systems		N/A
10.6.5.1	<p>General requirements</p> <p>Personal music players shall give the warnings as provided below when tested according to EN 50332-3, using the limits from this clause.</p> <p>The manufacturer may offer optional settings to allow the users to modify when and how they wish to receive the notifications and warnings to promote a better user experience without defeating the safeguards. This allows the users to be informed in a method that best meets their physical capabilities and device usage needs. If such optional settings are offered, an administrator (for example, parental restrictions, business/educational administrators, etc.) shall be able to lock any optional settings into a specific configuration.</p> <p>The personal music player shall be supplied with easy to understand explanation to the user of the dose management system, the risks involved, and how to use the system safely. The user shall be made aware that other sources may significantly contribute to their sound exposure, for example work, transportation, concerts, clubs, cinema, car races, etc.</p>		N/A
10.6.5.2	<p>Dose-based warning and requirements</p> <p>When a dose of 100 % <i>CSD</i> is reached, and at least at every 100 % further increase of <i>CSD</i>, the device shall warn the user and require an acknowledgement. In case the user does not acknowledge, the output level shall automatically decrease to compliance with class RS1.</p> <p>The warning shall at least clearly indicate that listening above 100 % <i>CSD</i> leads to the risk of hearing damage or loss.</p>		N/A
10.6.5.3	<p>Exposure-based requirements</p> <p>With only dose-based requirements, cause and effect could be far separated in time, defying the purpose of educating users about safe listening</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>practice. In addition to dose-based requirements, a PMP shall therefore also put a limit to the short-term sound level a user can listen at.</p> <p>The exposure-based limiter (EL) shall automatically reduce the sound level not to exceed 100 dB(A) or 150 mV integrated over the past 180 s, based on methodology defined in EN 50332-3.</p> <p>The EL settling time (time from starting level reduction to reaching target output) shall be 10 s or faster.</p> <p>Test of EL functionality is conducted according to EN 50332-3, using the limits from this clause. For equipment provided as a package (player with its listening device), the level integrated over 180 s shall be 100 dB or lower. For equipment provided with a standardized connector, the unweighted level integrated over 180 s shall be no more than 150 mV for an analogue interface and no more than -10 dBFS for a digital interface.</p> <p>NOTE In case the source is known not to be music (or test signal), the EL may be disabled.</p>		

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.6.6	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.6.1	Corded listening devices with analogue input With 94 dB L_{Aeq} acoustic pressure output of the listening device, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output, the input voltage of the listening device when playing the fixed “programme simulation noise” as described in EN 50332-1 shall be ≥ 75 mV. NOTE The values of 94 dB and 75 mV correspond with 85 dB and 27 mV or 100 dB and 150 mV.		N/A
10.6.6.2	Corded listening devices with digital input With any playing device playing the fixed “programme simulation noise” described in EN 50332-1, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output, the $L_{Aeq,T}$ acoustic output of the listening device shall be ≤ 100 dB with an input signal of -10 dBFS.		N/A
10.6.6.3	Cordless listening devices In cordless mode, – with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and – respecting the cordless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and – with volume and sound settings in the receiving device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the above mentioned programme simulation noise, the $L_{Aeq,T}$ acoustic output of the listening device shall be ≤ 100 dB with an input signal of -10 dBFS.		N/A
10.6.6.4	Measurement method <i>Measurements shall be made in accordance with EN 50332-2 as applicable.</i>		N/A
3	Modification to the whole document		

IEC 62368-1							
Clause	Requirement + Test			Result - Remark		Verdict	
	Delete all the “country” notes in the reference document according to the following list:					P	
	0.2.1	Note 1 and 2	1	Note 4 and 5	3.3.8.1		Note 2
	3.3.8.3	Note 1	4.1.15	Note	4.7.3		Note 1 and 2
	5.2.2.2	Note	5.4.2.3.2.2 Table 12	Note c	5.4.2.3.2.4		Note 1 and 3
	5.4.2.3.2.4 Table 13	Note 2	5.4.2.5	Note 2	5.4.5.1		Note
	5.4.10.2.1	Note	5.4.10.2.2	Note	5.4.10.2.3		Note
	5.5.2.1	Note	5.5.6	Note	5.6.4.2.1		Note 2 and 3 and 4
	5.6.8	Note 2	5.7.6	Note	5.7.7.1		Note 1 and Note 2
	8.5.4.2.3	Note	10.2.1 Table 39	Note 3 and 4 and 5	10.5.3		Note 2
	10.6.4	Note 3	F.3.3.6	Note 3	Y.4.1		Note
	Y.4.5	Note					
4	Modification to Clause 1					P	
1	Add the following note: NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU.					P	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5	Modification to 4.Z1		N/A
4.Z1	<p>Add the following new subclause after 4.9:</p> <p>To protect against excessive current, short-circuits and earth faults in circuits connected to an a.c. mains, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of B.3.1 and B.4 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> <p>c) it is permitted for pluggable equipment type B or permanently connected equipment, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for pluggable equipment type A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>		N/A
6	Modification to 5.4.2.3.2.4		N/A
5.4.2.3.2.4	<p>Add the following to the end of this subclause:</p> <p>The requirement for interconnection with external circuit is in addition given in EN 50491-3:2009.</p>		N/A
7	Modification to 10.2.1		N/A
10.2.1	<p>Add the following to ^{c)} and ^{d)} in table 39:</p> <p>For additional requirements, see 10.5.1.</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8	Modification to 10.5.1		N/A
10.5.1	<p>Add the following after the first paragraph:</p> <p>For RS 1 compliance is checked by measurement under the following conditions:</p> <p>In addition to the normal operating conditions, all controls adjustable from the outside by hand, by any object such as a tool or a coin, and those internal adjustments or pre-sets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made.</p> <p>NOTE Z1 Soldered joints and paint lockings are examples of adequate locking.</p> <p>The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm², at any point 10 cm from the outer surface of the apparatus.</p> <p>Moreover, the measurement shall be made under fault conditions causing an increase of the high voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made.</p> <p>For RS1, the dose-rate shall not exceed 1 µSv/h taking account of the background level.</p> <p>NOTE Z2 These values appear in Directive 96/29/Euratom of 13 May 1996.</p>		N/A
9	Modification to G.7.1		N/A
G.7.1	<p>Add the following note:</p> <p>NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10	Modification to Bibliography		N/A
	<p>Add the following notes for the standards indicated:</p> <p>IEC 60130-9 NOTE Harmonized as EN 60130-9. IEC 60269-2 NOTE Harmonized as HD 60269-2. IEC 60309-1 NOTE Harmonized as EN 60309-1. IEC 60364 NOTE some parts harmonized in HD 384/HD 60364 series. IEC 60601-2-4 NOTE Harmonized as EN 60601-2-4. IEC 60864-5 NOTE Harmonized as EN 60864-5. IEC 61032:1997 NOTE Harmonized as EN 61032:1998 (not modified). IEC 61508-1 NOTE Harmonized as EN 61508-1. IEC 61558-2-1 NOTE Harmonized as EN 61558-2-1. IEC 61558-2-4 NOTE Harmonized as EN 61558-2-4. IEC 61558-2-6 NOTE Harmonized as EN 61558-2-6. IEC 61643-1 NOTE Harmonized as EN 61643-1. IEC 61643-21 NOTE Harmonized as EN 61643-21. IEC 61643-311 NOTE Harmonized as EN 61643-311. IEC 61643-321 NOTE Harmonized as EN 61643-321. IEC 61643-331 NOTE Harmonized as EN 61643-331.</p>		N/A
11	ADDITION OF ANNEXES		N/A
ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		N/A
4.1.15	<p>Denmark, Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added: Class I pluggable equipment type A intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment shall be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In Denmark: "Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord." In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan" In Norway: "Apparatet må tilkoples jordet stikkontakt" In Sweden: "Apparaten skall anslutas till jordat uttag"</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.3	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363. Also see Annex G.4.2 of this annex</p>		P
5.2.2.2	<p>Denmark</p> <p>After the 2nd paragraph add the following:</p> <p>A warning (marking safeguard) for high touch current is required if the touch current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>		N/A
5.4.11.1 and Annex G	<p>Finland and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>For separation of the telecommunication network from earth the following is applicable:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> • two layers of thin sheet material, each of which shall pass the electric strength test below, or • one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> • passes the tests and inspection criteria of 5.4.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1,5 kV), <p>and</p> <ul style="list-style-type: none"> • is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5 kV. <p>It is permitted to bridge this insulation with a</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>capacitor complying with EN 60384-14:2005, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.11; the additional testing shall be performed on all the test specimens as described in EN 60384-14; <p>the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.</p>		
5.5.2.1	<p>Norway</p> <p>After the 3rd paragraph the following is added:</p> <p>Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).</p>		N/A
5.5.6	<p>Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>Resistors used as basic safeguard or bridging basic insulation in class I pluggable equipment type A shall comply with G.10.1 and the test of G.10.2.</p>		N/A
5.6.1	<p>Denmark</p> <p>Add to the end of the subclause Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment. <i>Justification:</i> In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.6.4.2.1	<p>Ireland and United Kingdom</p> <p>After the indent for pluggable equipment type A, the following is added: – the protective current rating is taken to be 13 A, this being the largest rating of fuse used in the mains plug.</p>		N/A
5.6.4.2.1	<p>France</p> <p>After the indent for pluggable equipment type A, the following is added: – in certain cases, the protective current rating of the circuit supplied from the mains is taken as 20 A instead of 16 A.</p>		N/A
5.6.5.1	<p>To the second paragraph the following is added:</p> <p>The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is: 1,25 mm² to 1,5 mm² in cross-sectional area.</p>		N/A
5.6.8	<p>Norway</p> <p>To the end of the subclause the following is added: Equipment connected with an earthed mains plug is classified as class I equipment. See the Norway marking requirement in 4.1.15. The symbol IEC 60417-6092, as specified in F.3.6.2, is accepted.</p>		N/A
5.7.6	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>The installation instruction shall be affixed to the equipment if the protective conductor current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.6.2	<p>Denmark</p> <p>To the end of the subclause the following is added: The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA .</p>		N/A
5.7.7.1	<p>Norway and Sweden</p> <p>To the end of the subclause the following is added: The screen of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system.</p> <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>“Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)”</p> <p>NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>nettet.”</p> <p>Translation to Swedish: ”Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet.”.</p>		
8.5.4.2.3	<p>United Kingdom</p> <p>Add the following after the 2nd dash bullet in 3rd paragraph:</p> <p>An emergency stop system complying with the requirements of IEC 60204-1 and ISO 13850 is required where there is a risk of personal injury.</p>		N/A
B.3.1 and B.4	<p>Ireland and United Kingdom</p> <p>The following is applicable:</p> <p>To protect against excessive currents and short-circuits in the primary circuit of direct plug-in equipment, tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32A. If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the direct plug-in equipment, until the requirements of Annexes B.3.1 and B.4 are met</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.4.2	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a polyphase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a.</p> <p>Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.</p> <p>Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a</p> <p><i>Justification:</i> Heavy Current Regulations, Section 6c</p>		N/A
G.4.2	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.1	<p>United Kingdom</p> <p>To the first paragraph the following is added:</p> <p>Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc. (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations.</p> <p>NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p>		N/A
G.7.1	<p>Ireland</p> <p>To the first paragraph the following is added:</p> <p>Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard</p>		N/A
G.7.2	<p>Ireland and United Kingdom</p> <p>To the first paragraph the following is added:</p> <p>A power supply cord with a conductor of 1,25 mm² is allowed for equipment which is rated over 10 A and up to and including 13 A.</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		N/A
10.5.2	<p>Germany</p> <p>The following requirement applies:</p> <p>For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking.</p> <p><i>Justification:</i> German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM.</p> <p>NOTE Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int+49-531-592-6320, Internet: http://www.ptb.de</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

ZD	IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS (EN)		N/A																																																				
	<table><tr><th rowspan="2">Type of flexible cord</th><th colspan="2">Code designations</th></tr><tr><th>IEC</th><th>CENELEC</th></tr><tr><td colspan="3">PVC insulated cords</td></tr><tr><td>Flat twin tinsel cord</td><td>60227 IEC 41</td><td>H03VH-Y</td></tr><tr><td>Light polyvinyl chloride sheathed flexible cord</td><td>60227 IEC 52</td><td>H03VV-F H03VVH2-F</td></tr><tr><td>Ordinary polyvinyl chloride sheathed flexible cord</td><td>60227 IEC 53</td><td>H05VV-F H05VVH2-F</td></tr><tr><td colspan="3">Rubber insulated cords</td></tr><tr><td>Braided cord</td><td>60245 IEC 51</td><td>H03RT-F</td></tr><tr><td>Ordinary tough rubber sheathed flexible cord</td><td>60245 IEC 53</td><td>H05RR-F</td></tr><tr><td>Ordinary polychloroprene sheathed flexible cord</td><td>60245 IEC 57</td><td>H05RN-F</td></tr><tr><td>Heavy polychloroprene sheathed flexible cord</td><td>60245 IEC 66</td><td>H07RN-F</td></tr><tr><td colspan="3">Cords having high flexibility</td></tr><tr><td>Rubber insulated and sheathed cord</td><td>60245 IEC 86</td><td>H03RR-H</td></tr><tr><td>Rubber insulated, crosslinked PVC sheathed cord</td><td>60245 IEC 87</td><td>H03RV4-H</td></tr><tr><td>Crosslinked PVC insulated and sheathed cord</td><td>60245 IEC 88</td><td>H03V4V4-H</td></tr><tr><td colspan="3">Cords insulated and sheathed with halogen-free thermoplastic compounds</td></tr><tr><td>Light halogen-free thermoplastic insulated and sheathed flexible cords</td><td></td><td>H03Z1Z1-F H03Z1Z1H2-F</td></tr><tr><td>Ordinary halogen-free thermoplastic insulated and sheathed flexible cords</td><td></td><td>H05Z1Z1-F H05Z1Z1H2-F</td></tr></table>	Type of flexible cord	Code designations		IEC	CENELEC	PVC insulated cords			Flat twin tinsel cord	60227 IEC 41	H03VH-Y	Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F	Ordinary polyvinyl chloride sheathed flexible cord	60227 IEC 53	H05VV-F H05VVH2-F	Rubber insulated cords			Braided cord	60245 IEC 51	H03RT-F	Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F	Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F	Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F	Cords having high flexibility			Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H	Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H	Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H	Cords insulated and sheathed with halogen-free thermoplastic compounds			Light halogen-free thermoplastic insulated and sheathed flexible cords		H03Z1Z1-F H03Z1Z1H2-F	Ordinary halogen-free thermoplastic insulated and sheathed flexible cords		H05Z1Z1-F H05Z1Z1H2-F	N/A
Type of flexible cord	Code designations																																																						
	IEC	CENELEC																																																					
PVC insulated cords																																																							
Flat twin tinsel cord	60227 IEC 41	H03VH-Y																																																					
Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F																																																					
Ordinary polyvinyl chloride sheathed flexible cord	60227 IEC 53	H05VV-F H05VVH2-F																																																					
Rubber insulated cords																																																							
Braided cord	60245 IEC 51	H03RT-F																																																					
Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F																																																					
Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F																																																					
Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F																																																					
Cords having high flexibility																																																							
Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H																																																					
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H																																																					
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H																																																					
Cords insulated and sheathed with halogen-free thermoplastic compounds																																																							
Light halogen-free thermoplastic insulated and sheathed flexible cords		H03Z1Z1-F H03Z1Z1H2-F																																																					
Ordinary halogen-free thermoplastic insulated and sheathed flexible cords		H05Z1Z1-F H05Z1Z1H2-F																																																					

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.2	TABLE: Classification of electrical energy sources						P
Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters				ES Class
			U (V)	I (mA)	Type ¹⁾	Additional Info ²⁾	
264Vac	Primary circuits	Normal	--	--	SS	--	ES3
		Abnormal	--	--	SS	--	
		Single fault – SC/OC	--	--	SS	--	
264Vac	T1 pin 6-7	Normal	36.0Vpk	--	SS	--	ES1
		Abnormal	36.0Vpk	--	SS	--	
		Single fault – EC1 short circuit	0	--	--	--	
264Vac	L/N to Plastic enclosure with metal foil	Normal	--	0.068mA _{pk}	SS	--	ES1
		Abnormal	--	0.068mA _{pk}	SS	--	
		Single fault – EC1 short circuit	--	0.068mA _{pk}	SS	--	
264Vac	L/N to J3 port (RJ45)	Normal	--	0.084mA _{pk}	SS	--	ES1
		Abnormal	--	0.084mA _{pk}	SS	--	
		Single fault – EC1 short circuit	--	0.084mA _{pk}	SS	--	

Supplementary information: All above test results also conform to all model transformer.

1) Type: Steady state (SS), Capacitance (CP), Single pulse (SP), Repetitive pulses (RP), etc.

2) Additional Info: Frequency, Pulse duration, Pulse off time, Capacitance value, etc.

5.4.1.8	TABLE: Working voltage measurement				P
Location		RMS voltage (V)	Peak voltage (V)	Frequency (Hz)	Comments
The Transformer (T1) from JIASHENGYUAN ELECTRONICS CO.,LTD					
Pin 5 to pin 6		169	348	--	--
Pin 4 to pin 6		222	576	--	Max. V_{Peak} & V_{RMS}
Pin 2 to pin 6		166	320	--	--
Pin 1 to pin 6		193	388	--	--
Pin 5 to pin 7		166	320	--	--
Pin 4 to pin 7		210	556	--	--
Pin 2 to pin 7		165	324	--	--
Pin 1 to pin 7		193	412	--	--

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

The Transformer (T1) from Dongguan City Sun Mao Electronics Co.,Ltd.(Hung Kay Industrial Co.,Ltd.)				
Pin 5 to pin 6	168	348	--	--
Pin 4 to pin 6	222	572	--	Max. V_{Peak} & V_{RMS}
Pin 2 to pin 6	166	316	--	--
Pin 1 to pin 6	196	388	--	--
Pin 5 to pin 7	195	416	--	--
Pin 4 to pin 7	166	324	--	--
Pin 2 to pin 7	210	536	--	--
Pin 1 to pin 7	167	320	--	--
Supplementary information:				

5.4.1.10.2	TABLE: Vicat softening temperature of thermoplastics			N/A
Method :		ISO 306 / B50		—
Object/ Part No./Material	Manufacturer/trademark	Thickness (mm)	T softening (°C)	
--	--	--	--	
--	--	--	--	
Supplementary information:				

5.4.1.10.3	TABLE: Ball pressure test of thermoplastics				P
Allowed impression diameter (mm) :			≤ 2 mm		—
Object/Part No./Material	Manufacturer/trademark	Thickness (mm)	Test temperature (°C)	Impression diameter (mm)	
Plastic enclosure and plug pin	SABIC JAPAN L L C	3.0	125	1.4	
Supplementary information: Bobbin of transformer T1 is made of phenolic materials, no need do test.					

5.4.2, 5.4.3	TABLE: Minimum Clearances/Creepage distance							P
Clearance (cl) and creepage distance (cr) at/of/between:	U_p (V)	U_{rms} (V)	Freq ¹⁾ (Hz)	Required cl (mm)	cl (mm)	E.S. ²⁾ (V)	Required cr (mm)	cr (mm)
Basic insulation:								
L to N before fuse resistor F1	340	240	<30	1.5	4.1	--	2.4	4.1
L to primary circuit after fuse resistor F1	340	240	<30	1.5	2.8	--	2.4	2.8
Two pins of fuse	340	240	<30	1.5	2.9	--	2.4	2.9

IEC 62368-1								
Clause	Requirement + Test				Result - Remark			Verdict
resistor F1								
Reinforced insulation:								
L PCB trace to Secondary PCB trace(EC3)	340	240	<30	3.0	4.6	--	4.8	8.0
R1 PCB trace to Secondary pin of T1	340	240	<30	3.0	6.7	--	4.8	6.7
L PCB trace to accessible plastic enclosure	340	240	<30	3.0	7.4	--	4.8	7.7
EC1 PCB trace to accessible plastic enclosure	340	240	<30	3.0	6.6	--	4.8	6.6
N PCB trace to fixed screw holes of plastic enclosure	340	240	<30	3.0	7.2	--	4.8	7.2
EC2 body to function PCB trace	340	240	<30	3.0	7.0	--	4.8	9.0
Core of T1 to EC3 body (On PCB)	576	240	<30	3.0	8.6	--	4.8	8.6
Core of T1 to Secondary.pin of T1 (On PCB)	576	240	<30	3.0	10	--	4.8	10
Core of T1 to Secondary.pin of T1 (On Body)	576	240	<30	3.0	10	--	4.8	11.9
Primary Winding of T1 to Secondary.pin of T1 (On Body)	576	240	<30	3.0	8.8	--	6.0	8.8
Supplementary information:								
1) Only for frequency above 30 kHz								
2) Complete Electric Strength voltage (E.S. (V) when 5.4.2.4 applied)								
3) Altitude : Less than 2000m								
1. The core was considered as primary circuits.								
2. The F1 was covered by heat-shrinkable tube.								
3. Mylar sheet between power PCB and plug pin.								
4. EC1 and F1 were fixed by glue.								
5. All transformer has same construction, above test results also conform to all transformer.								

5.4.4.2	TABLE: Minimum distance through insulation				P
Distance through insulation (DTI) at/of	Peak voltage (V)	Insulation	Required DTI (mm)	Measured DTI (mm)	
Plastic enclosure and plug pin	576V	Reinforce	0.4	Min.1.9	

IEC 62368-1				
Clause	Requirement + Test		Result - Remark	Verdict
holder				
Bobbin of transformer T1	576V	Reinforce	0.4	Min.1.0
Supplementary information:				

5.4.4.9	TABLE: Solid insulation at frequencies >30 kHz					N/A
Insulation material	E_p	Frequency (kHz)	K_R	Thickness d (mm)	Insulation	V_{PW} (Vpk)
--	--	--	--	--	--	--
--	--	--	--	--	--	--
Supplementary information:						

5.4.9	TABLE: Electric strength tests			P
Test voltage applied between:		Voltage shape (Surge, Impulse, AC, DC, etc.)	Test voltage (V)	Breakdown Yes / No
Basic insulation				
L to N before fuse (F1 disconnected)		DC	2500V	No
Mylar sheet		DC	2500V	No
Heat-shrinkable tube		DC	2500V	No
Reinforce insulation				
L/N to plastic enclosure		DC	4000V	No
L/N to J3 port (RJ45)		DC	4000V	No
T1 Pri. to Sec. Pin		DC	4000V	No
T1 Core to Sec. Pin		DC	4000V	No
Any one layer insulation tape of transformer T1		DC	4000V	No
Supplementary information: When used dc voltage test, the voltage is gradually raised from zero to the prescribed voltage and maintained at that value for 60s, then retested it in reverse polarity.				

5.5.2.2	TABLE: Stored discharge on capacitors					N/A
Location	Supply voltage (V)	Operating and fault condition ¹⁾	Switch position	Measured voltage (Vpk)	ES Class	
--	--	--	--	--	--	
--	--	--	--	--	--	
--	--	--	--	--	--	
Supplementary information:.						
X-capacitors installed for testing:						
<input type="checkbox"/> bleeding resistor rating:						

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

☐ ICX:

1) Normal operating condition (e.g., normal operation, or open fuse), SC= short circuit, OC= open circuit

5.6.6	TABLE: Resistance of protective conductors and terminations				N/A
Location	Test current (A)	Duration (min)	Voltage drop (V)	Resistance (Ω)	
--	--	--	--	--	
Supplementary information:					

5.7.4	TABLE: Unearthed accessible parts					P
Location	Operating and fault conditions	Supply Voltage (V)	Parameters			ES class
			Voltage (V_{rms} or V_{pk})	Current (A_{rms} or A_{pk})	Freq. (Hz)	
--	--	--	--	--	--	--
Supplementary information: See appended table 5.2						
Abbreviation: SC= short circuit; OC= open circuit						

5.7.5	TABLE: Earthed accessible conductive part				N/A
Supply voltage (V) :					—
Phase(s) :		[] Single Phase; [] Three Phase: [] Delta [] Wye			
Power Distribution System :		[] TN [] TT [] IT			
Location		Fault Condition No in IEC 60990 clause 6.2.2	Touch current (mA)	Comment	
--		--	--	--	
Supplementary Information:					

5.8	TABLE: Backfeed safeguard in battery backed up supplies					N/A
Location	Supply voltage (V)	Operating and fault condition	Time (s)	Open-circuit voltage (V)	Touch current (A)	ES Class
--	--	--	--	--	--	--
Supplementary information:						
Abbreviation: SC= short circuit, OC= open circuit						

6.2.2	TABLE: Power source circuit classifications					P
Location	Operating and fault condition	Voltage (V)	Current (A)	Max. Power ¹⁾ (W)	Time (S)	PS class
Primary circuits	--	Max. 264V~	--	--	--	PS3 (Declared)

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Power switch supply output J2	Normal condition	12.253	1.3	15.93	5	PS2
Power switch supply output J2	EC1 short circuit	0	0	0	3	PS1

Supplementary information:

Abbreviation: SC= short circuit; OC= open circuit

1) Measured after 3 s for PS1 and measured after 5 s for PS2 and PS3.

6.2.3.1	TABLE: Determination of Arcing PIS				P
Location	Open circuit voltage after 3 s (Vpk)	Measured r.m.s current (A)	Calculated value	Arcing PIS? Yes / No	
All primary circuits	--	--	--	Yes	
--	--	--	--	--	
--	--	--	--	--	
Supplementary information:					

6.2.3.2	TABLE: Determination of resistive PIS			P
Location	Operating and fault condition	Dissipate power (W)	Resistive PIS? Yes / No	
All primary circuits	--	--	Yes	
J2 output	--	--	Yes	
--	--	--	--	
Supplementary information: All primary circuits was considered as PS3, exist Resistive PIS.				
Abbreviation: SC= short circuit; OC= open circuit				

8.5.5	TABLE: High pressure lamp				N/A
Lamp manufacturer	Lamp type	Explosion method	Longest axis of glass particle (mm)	Particle found beyond 1 m Yes / No	
--	--	--	--	--	
--	--	--	--	--	
--	--	--	--	--	
Supplementary information:					

9.6	TABLE: Temperature measurements for wireless power transmitters		N/A
Supply voltage (V) :			—
Max. transmit power of transmitter (W) :			—

IEC 62368-1								
Clause	Requirement + Test				Result - Remark			Verdict
Foreign objects	w/o receiver and direct contact		with receiver and direct contact		with receiver and at distance of 2 mm		with receiver and at distance of 5 mm	
	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
Supplementary information:								

5.4.1.4, 9.3, B.1.5, B.2.6	TABLE: Temperature measurements								P		
Supply voltage (V) :			90V/60Hz Horizontal		90V/60Hz Vertical		264V/50Hz Horizontal		264V/50Hz Vertical		—
Ambient temperature during test Tamb (°C) :			22.4		23.1		21.5		24.1		—
Maximum measured temperature T of part/at:			T (°C)								Allowed Tmax (°C)
Ambient			22.4	40.0	23.1	40.0	21.5	40.0	24.1	40.0	--
PCB near BD1			37.0	54.6	34.0	50.9	37.3	55.8	34.8	50.7	105
PCB near U1			46.6	64.2	42.5	59.4	52.3	70.8	48.9	64.8	105
EC1 body			36.3	53.9	32.9	49.8	37.4	55.9	33.5	49.4	105
EC2 body			44.6	62.2	38.8	55.7	47.2	65.7	43.2	59.1	105
T1 core			47.6	65.2	42.5	59.4	50.2	68.7	45.9	61.8	90*
T1 winding			47.8	65.4	42.6	59.5	50.6	69.1	46.1	62.0	90*
PCB under T1			49.0	66.6	44.5	61.4	52.0	70.5	48.2	64.1	105
EC3 body			35.9	53.5	32.2	49.1	37.0	55.5	33.8	49.7	105
EC4 body			38.1	55.7	33.9	50.8	38.9	57.4	35.5	51.4	105
PCB near U15 of primary PCB			64.6	82.2	61.1	78.0	64.0	82.5	62.8	78.7	105
PCB near U1 of primary PCB			67.8	85.4	64.6	81.5	66.6	85.1	66.4	82.3	105
PCB near U8 of primary PCB			60.9	78.5	56.9	73.8	60.5	79.0	58.8	74.7	105
PCB near U6 of primary PCB			61.8	79.4	58.3	75.2	61.1	79.6	59.9	75.8	105
Internal surface of plastic under primary PCB			31.4	49.0	29.1	46.0	31.7	50.2	30.5	46.4	120
Internal surface of plug holder			49.1	66.7	45.9	62.8	48.4	66.9	47.8	63.7	120
Accessible parts (shift to 25°C)											
Ambient			22.4	25.0	23.1	25.0	21.5	25.0	24.1	25.0	--
Top plastic enclosure			34.6	37.2	30.0	31.9	35.7	39.2	31.4	32.3	77

IEC 62368-1										
Clause	Requirement + Test				Result - Remark				Verdict	
Bottom plastic enclosure		43.2	45.8	40.6	42.5	42.0	45.5	42.2	43.1	77
Plug holder(EU plug)		26.2	28.8	26.2	28.1	26.7	30.2	27.7	28.6	77
Temperature T of winding:	t1 (°C)	R1 (Ω)	t2 (°C)	R2 (Ω)	T (°C)	Allowed Tmax (°C)	Insulation class			
--	--	--	--	--	--	--	--			
--	--	--	--	--	--	--	--			
--	--	--	--	--	--	--	--			
Supplementary information: 1)*The insulation class of transformer considered as class A. Class A: Tmax = 100-10=90°C 2) External surfaces touched occasionally for very short periodes: 1s<t<10s. 3) For the other components temperature limit, see appended table 4.1.2. 4) Tma=40°C 5) The Transformer (T1) from JIASHENGYUAN ELECTRONICS CO.,LTD										

5.4.1.4, 9.3, B.1.5, B.2.6	TABLE: Temperature measurements								P		
Supply voltage (V) :			90V/60Hz Horizontal		90V/60Hz Vertical		264V/50Hz Horizontal		264V/50Hz Vertical		—
Ambient temperature during test Tamb (°C) :			24.7		25.0		23.7		26.1		—
Maximum measured temperature T of part/at:			T (°C)								Allowed Tmax (°C)
Ambient			24.7	40.0	25.0	40.0	23.7	40.0	26.1	40.0	--
PCB near BD1			41.0	56.3	37.0	52.0	38.3	54.6	37.2	51.1	105
PCB near U1			51.3	66.6	46.2	61.2	53.7	70.0	51.5	65.4	105
EC1 body			39.7	55.0	35.1	50.1	37.8	54.1	36.3	50.2	105
EC2 body			48.5	63.8	43.4	58.4	48.9	65.2	46.0	59.9	105
T1 winding			49.5	64.8	43.5	58.5	49.6	65.9	46.6	60.5	90*
T1 core			49.4	64.7	43.0	58.0	49.6	65.9	46.3	60.2	90*
PCB under T1			45.8	61.1	40.7	55.7	45.3	61.6	43.5	57.4	105
EC3 body			40.0	55.3	34.8	49.8	38.5	54.8	36.5	50.4	105
EC4 body			41.8	57.1	36.3	51.3	40.7	57.0	38.1	52.0	105
PCB near U15 of primary PCB			66.7	82.0	64.4	79.4	66.3	82.6	65.7	79.6	105
PCB near U1 of primary PCB			69.7	85.0	67.9	82.9	69.4	85.7	69.2	83.1	105
PCB near U8 of primary PCB			62.8	78.1	59.7	74.7	62.1	78.4	61.0	74.9	105
PCB near U6 of primary PCB			64.2	79.5	61.7	76.7	63.4	79.7	62.9	76.8	105

IEC 62368-1									
Clause	Requirement + Test			Result - Remark				Verdict	
Internal surface of plastic under primary PCB	34.8	50.1	31.3	46.3	33.4	49.7	33.1	47.0	120
Internal surface of plug holder	51.9	67.2	50.3	65.3	51.6	67.9	51.6	65.5	120
Accessible parts (shift to 25°C)									
Ambient	24.7	25.0	25.0	--	23.7	40.0	26.1	--	--
Top plastic enclosure	38.3	38.6	32.9	--	36.7	38.0	34.5	--	77
Bottom plastic enclosure	44.9	45.2	44.1	--	45.4	46.7	45.3	--	77
Plug holder(EU plug)	29.8	30.1	29.4	--	28.2	29.5	30.4	--	77
Temperature T of winding:	t1 (°C)	R1 (Ω)	t2 (°C)	R2 (Ω)	T (°C)	Allowed Tmax (°C)	Insulation class		
--	--	--	--	--	--	--	--		
--	--	--	--	--	--	--	--		
--	--	--	--	--	--	--	--		
Supplementary information:									
1)*The insulation class of transformer considered as class A. Class A: Tmax = 100-10=90°C									
2) External surfaces touched occasionally for very short periodes: 1s<t<10s.									
3) For the other components temperature limit, see appended table 4.1.2.									
4)Tma=40°C									
5) The Transformer (T1) from Dongguan City Sun Mao Electronics Co.,Ltd.(Hung Kay Industrial Co.,Ltd.)									

B.2.5		TABLE: Input test							P
U (V)	Hz	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
The Transformer (T1) from JIASHENGYUAN ELECTRONICS CO.,LTD									
90V	50	0.074	--	3.38	--	F1	0.074	Max. normal operating condition .	
90V	60	0.074	--	3.38	--	F1	0.074	Max. normal operating condition .	
100V	50	0.069	0.4	3.38	--	F1	0.069	Max. normal operating condition .	
100V	60	0.069	0.4	3.38	--	F1	0.069	Max. normal operating condition .	
240V	50	0.041	0.4	3.47	--	F1	0.041	Max. normal operating condition .	
240V	60	0.041	0.4	3.47	--	F1	0.041	Max. normal operating condition .	

IEC 62368-1								
Clause	Requirement + Test					Result - Remark		Verdict
264V	50	0.039	--	3.49	--	F1	0.039	Max. normal operating condition .
264V	60	0.039	--	3.49	--	F1	0.039	Max. normal operating condition .
The Transformer (T1) from Dongguan City Sun Mao Electronics Co.,Ltd.(Hung Kay Industrial Co.,Ltd.)								
90V	50	0.073	--	3.35	--	F1	0.073	Max. normal operating condition .
90V	60	0.073	--	3.35	--	F1	0.073	Max. normal operating condition .
100V	50	0.068	0.4	3.38	--	F1	0.068	Max. normal operating condition .
100V	60	0.068	0.4	3.38	--	F1	0.068	Max. normal operating condition .
240V	50	0.041	0.4	3.36	--	F1	0.041	Max. normal operating condition .
240V	60	0.041	0.4	3.36	--	F1	0.041	Max. normal operating condition .
264V	50	0.039	--	3.47	--	F1	0.039	Max. normal operating condition .
264V	60	0.039	--	3.47	--	F1	0.039	Max. normal operating condition .
Supplementary information:								

B.3	TABLE: Abnormal operating tests						P
Ambient temperature T _{amb} (°C) :					25.8°C Max.		—
Power source for EUT: Manufacturer, model/type, output rating :					See label		—
Component No.	Condition	Supply voltage (V)	Test time	Fuse no.	Fuse current (A)	Observation	
The Transformer (T1) from JIASHENGYUAN ELECTRONICS CO.,LTD							

IEC 62368-1						
Clause	Requirement + Test				Result - Remark	
Openings	Blocked	264V	3hours	F1	0.039	During the test, all safeguards remain effective. After test, all safeguards comply with applicable requirements. And the temperature less than the limit of TS2.
						Ambient 20.7
						PCB near U1 52.5
						T1 core 50.0
						T1 winding 50.4
						PCB under T1 51.9
						PCB near U15 of primary PCB 65.5
						PCB near U1 of primary PCB 68.4
						Top plastic enclosure 35.6
						Bottom plastic enclosure 43.2
						Plug holder 26.3

IEC 62368-1							
Clause	Requirement + Test			Result - Remark		Verdict	
Transformer T1 output (EC3)	Overload	264V	7hours	F1	0.039 to 0.143 to 0.152 to 0.157 to 0.021	The transformer (T1) output overload current was 1.3A, 15.93W, the temperature was state. When the overload current rise to 1.35A, the unit shut down immediately, no fire or molten metal occurred, no hazard.	
						The Max. temperature of winding less than the limit of Class A for table G.3.	
						The temperature of accessible plastic enclosure less than the limit of TS2.	
						Ambient	24.3
						PCB near U1	98.6
						T1 core	99.6
						T1 winding	98.4
						PCB under T1	106.5
						PCB near U15 of primary PCB	72.1
						PCB near U1 of primary PCB	74.1
						Top plastic enclosure	56.4
						Bottom plastic enclosure	49.5
						Plug holder	36.2
Transformer T1 output (EC3)	Short circuit	264V	30mins	F1	0.021	Unit shut down immediately, no fire or molten metal occurred, no hazard.	
The Transformer (T1) from Dongguan City Sun Mao Electronics Co.,Ltd.(Hung Kay Industrial Co.,Ltd.)							
Openings	Blocked	264V	3hours	F1	0.039	During the test, all safeguards remain effective. After test, all safeguards comply with applicable requirements. And the temperature less than the limit of TS2.	
						Ambient	25.7
						PCB near U1	56.3
						T1 winding	51.9
						T1 core	51.9
						PCB under T1	47.7

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

						<table><tr><td>PCB near U15 of primary PCB</td><td>69.1</td></tr><tr><td>PCB near U1 of primary PCB</td><td>72.3</td></tr><tr><td>Top plastic enclosure</td><td>40.1</td></tr><tr><td>Bottom plastic enclosure</td><td>47.1</td></tr><tr><td>Plug holder</td><td>30.6</td></tr></table>	PCB near U15 of primary PCB	69.1	PCB near U1 of primary PCB	72.3	Top plastic enclosure	40.1	Bottom plastic enclosure	47.1	Plug holder	30.6																
PCB near U15 of primary PCB	69.1																															
PCB near U1 of primary PCB	72.3																															
Top plastic enclosure	40.1																															
Bottom plastic enclosure	47.1																															
Plug holder	30.6																															
Transformer T1 output (EC3)	Overload	264V	7hours	F1	0.039 to 0.142 to 0.152 to 0.157 to 0.021	<table><tr><td colspan="2">The transformer (T1) output overload current was 1.32A, 15.96W, the temperature was state. When the overload current rise to 1.36A, the unit shut down immediately, no fire or molten metal occurred, no hazard.</td></tr><tr><td colspan="2">The Max. temperature of winding less than the limit of Class A for table G.3.</td></tr><tr><td colspan="2">The temperature of accessible plastic enclosure less than the limit of TS2.</td></tr><tr><td>Ambient</td><td>25.8</td></tr><tr><td>PCB near U1</td><td>97.1</td></tr><tr><td>T1 winding</td><td>98.6</td></tr><tr><td>T1 core</td><td>95.7</td></tr><tr><td>PCB under T1</td><td>85.1</td></tr><tr><td>PCB near U15 of primary PCB</td><td>73.5</td></tr><tr><td>PCB near U1 of primary PCB</td><td>76.2</td></tr><tr><td>Top plastic enclosure</td><td>56.3</td></tr><tr><td>Bottom plastic enclosure</td><td>51.3</td></tr><tr><td>Plug holder</td><td>36.1</td></tr></table>	The transformer (T1) output overload current was 1.32A, 15.96W, the temperature was state. When the overload current rise to 1.36A, the unit shut down immediately, no fire or molten metal occurred, no hazard.		The Max. temperature of winding less than the limit of Class A for table G.3.		The temperature of accessible plastic enclosure less than the limit of TS2.		Ambient	25.8	PCB near U1	97.1	T1 winding	98.6	T1 core	95.7	PCB under T1	85.1	PCB near U15 of primary PCB	73.5	PCB near U1 of primary PCB	76.2	Top plastic enclosure	56.3	Bottom plastic enclosure	51.3	Plug holder	36.1
The transformer (T1) output overload current was 1.32A, 15.96W, the temperature was state. When the overload current rise to 1.36A, the unit shut down immediately, no fire or molten metal occurred, no hazard.																																
The Max. temperature of winding less than the limit of Class A for table G.3.																																
The temperature of accessible plastic enclosure less than the limit of TS2.																																
Ambient	25.8																															
PCB near U1	97.1																															
T1 winding	98.6																															
T1 core	95.7																															
PCB under T1	85.1																															
PCB near U15 of primary PCB	73.5																															
PCB near U1 of primary PCB	76.2																															
Top plastic enclosure	56.3																															
Bottom plastic enclosure	51.3																															
Plug holder	36.1																															
Transformer T1 output (EC3)	Short circuit	264V	30mins	F1	0.021	Unit shut down immediately, no fire or molten metal occurred, no hazard.																										

Supplementary information:

- After test, all safeguards comply with applicable requirements. The Hi-pot test conducted successfully after the completion of fault condition test.
- The insulation class of transformer considered as class A, the T1 Winding limit is 150°C-10°C-(40°C - 20.7°C)=120.7°C at overload conditions.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

3. Bottom , top plastic enclosure and holder limit is 87°C at abnormal and single fault conditions.
4. All types of fuse resistors in appended table 4.1.2 were repeated 10 times when it operated during test, the test results are the same, no hazards.

B.4 TABLE: Fault condition tests						P
Ambient temperature T_{amb} (°C) :					23.0	—
Power source for EUT: Manufacturer, model/type, output rating :					See label	—
Component No.	Condition	Supply voltage (V)	Test time	Fuse no.	Fuse current (A)	Observation
BD1 pin 2 to 3	Short circuit	264V	<1s	F1	0	Fuse resistor F1 opened immediately, no fire or molten metal occurred, no hazard.
BD1 pin 1 to 4	Short circuit	264V	<1s	F1	0	Fuse resistor F1 opened immediately, no fire or molten metal occurred, no hazard.
EC1	Short circuit	264V	<1s	F1	0	Fuse resistor F1 opened immediately, no fire or molten metal occurred, no hazard.
EC2	Short circuit	264V	<1s	F1	0	Fuse resistor F1 opened immediately, no fire or molten metal occurred, no hazard.
EC4	Short circuit	264V	<1s	F1	0.021	Unit shut down immediately, no fire or molten metal occurred, no hazard.
U1 pin 5,6,7,8-2	Short circuit	264V	<1s	F1	0	Fuse resistor F1 opened immediately, no fire or molten metal occurred, no hazard.
U1 pin 5,6,7,8-4	Short circuit	264V	30mins	F1	0	Fuse resistor F1 opened immediately, no fire or molten metal occurred, no hazard.
U1 pin 5,6,7,8-3	Short circuit	264V	30mins	F1	0.021	Unit shut down immediately, no fire or molten metal occurred, no hazard.
U1 pin 5,6,7,8-1	Short circuit	264V	30mins	F1	0.021	Unit shut down immediately, no fire or molten metal occurred, no hazard.

IEC 62368-1						
Clause	Requirement + Test			Result - Remark		Verdict
T1 pin 3-4	Short circuit	264V	30mins	F1	0.021	Unit shut down immediately, no fire or molten metal occurred, no hazard.
T1 pin 1-3	Short circuit	264V	30mins	F1	0.021	Unit shut down immediately, no fire or molten metal occurred, no hazard.
R3	Short circuit	264V	30mins	F1	0.039	Unit normal working, no fire or molten metal occurred, no hazard.
C2	Short circuit	264V	30mins	F1	0.039	Unit normal working, no fire or molten metal occurred, no hazard.
D3	Short circuit	264V	30mins	F1	0.006	Unit shut down immediately, no fire or molten metal occurred, no hazard.
C7	Short circuit	264V	30mins	F1	0.006	Unit shut down immediately, no fire or molten metal occurred, no hazard.
C8	Short circuit	264V	30mins	F1	0.006	Unit shut down immediately, no fire or molten metal occurred, no hazard.
Supplementary information: 1. After test, all safeguards comply with applicable requirements. The Hi-pot test conducted successfully after the completion of fault condition test. 2. All types of fuse resistors in appended table 4.1.2 were repeated 10 times when it operated during test, the test results are the same, no hazards. 3. All above test results also conform to all model transformer.						

M.3	TABLE: Protection circuits for batteries provided within the equipment					N/A
Is it possible to install the battery in a reverse polarity position? :					—	
Equipment Specification	Charging					
	Voltage (V)		Current (A)			
	--		--			
Manufacturer/type	Battery specification					
	Non-rechargeable batteries		Rechargeable batteries			
	Discharging current (A)	Unintentional charging current (A)	Charging		Discharging current (A)	Reverse charging current (A)
			Voltage (V)	Current (A)		

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

--	--	--	--	--	--	--
--	--	--	--	--	--	--
--	--	--	--	--	--	--

Note: The tests of M.3.2 are applicable only when above appropriate data is not available.

Specified battery temperature (°C) :

Component No.	Fault condition	Charge/discharge mode	Test time	Temp. (°C)	Current (A)	Voltage (V)	Observation
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Supplementary information:

Abbreviation: SC= short circuit; OC= open circuit NL= no chemical leakage; NS= no spillage of liquid; NE= no explosion; NF= no emission of flame or expulsion of molten metal.

M.4.2	TABLE: Charging safeguards for equipment containing a secondary lithium battery					N/A
Maximum specified charging voltage (V) :					--	---
Maximum specified charging current (A) :					--	---
Highest specified charging temperature (°C) :					--	---
Lowest specified charging temperature (°C) :					--	---
Battery manufacturer/type	Operating and fault condition	Measurement			Observation	
		Charging voltage (V)	Charging current (A)	Temp. (°C)		
--	--	--	--	--	--	
--	--	--	--	--	--	
--	--	--	--	--	--	

Supplementary information:

Abbreviation: SC= short circuit; OC= open circuit; MSCV= maximum specified charging voltage; MSCC= maximum specified charging current; HSCT= highest specified charging temperature; LSCT= lowest specified charging temperature

Q.1	TABLE: Circuits intended for interconnection with building wiring (LPS)						N/A
Output Circuit	Condition	U _{oc} (V)	Time (s)	I _{sc} (A)		S (VA)	
				Meas.	Limit	Meas.	Limit
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary Information:

T.2, T.3, T.4, T.5		TABLE: Steady force test					P
Part/Location	Material	Thickness (mm)	Probe	Force (N)	Test Duration (s)	Observation	
Internal components and conductor	--	--	--	10	5s	No reduction the clearances and creepage distances	
Top plastic enclosure	Plastic	Min.1.9 mm	Circular plane surface 30 mm in diameter	100	5s	No reduction the clearances and creepage distances	
Bottom plastic enclosure	Plastic	Min.1.9 mm	Circular plane surface 30 mm in diameter	100	5s	No reduction the clearances and creepage distances	
Side plastic enclosure	Plastic	Min.1.9 mm	Circular plane surface 30 mm in diameter	100	5s	No reduction the clearances and creepage distances	

Supplementary information:

T.6, T.9		TABLE: Impact test				N/A
Location/part	Material	Thickness (mm)	Height (mm)	Observation		
--	--	--	--	--		
--	--	--	--	--		

Supplementary information:

T.7		TABLE: Drop test				P
Location/part	Material	Thickness (mm)	Height (mm)	Observation		
Top plastic enclosure	Plastic	Min.1.9 mm	1000	No reduction the clearances and creepage distances		
Bottom plastic enclosure	Plastic	Min.1.9 mm	1000	No reduction the clearances and creepage distances		
Side plastic enclosure	Plastic	Min.1.9 mm	1000	No reduction the clearances and creepage distances		

Supplementary information:

T.8		TABLE: Stress relief test				P
Location/Part	Material	Thickness	Oven Temperature	Duration	Observation	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

		(mm)	(°C)	(h)	
Plastic enclosure	Plastic	Min.1.9 mm	77.9	7	Enclosure remained intact, no crack opening developed. No insulation breakdown.

Supplementary information:

X	TABLE: Alternative method for determining minimum clearances distances			N/A
Clearance distanced between:	Peak of working voltage (V)	Required cl (mm)	Measured cl (mm)	
--	--	--	--	

Supplementary information:

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.1.2	TABLE: List of critical components (#)					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾	
UK plug	SHENZHEN TENDA TECHNOLOGY CO.,LTD.	A18 Pro, A18	100-240V~, 50/60Hz, 0.4A	BS 1363- 1:2016+A1:2018	BACL Report No.: 2401Z10702 1E-SF	
Plastic enclosure and plug pin holder	SABIC JAPAN L L C	940(f1)	V-0, 120°C, min. thickness 1.5mm Measure thickness: Min.1.9mm	UL 94, UL 746 IEC 62368-1:2018 EN IEC 62368- 1:2020 BS EN IEC 62368-1:2020	UL E207780 Test with appliance	
Mylar sheet	SICHUAN DONGFANG INSULATING MATERIAL CO LTD	DFR3A(d), DFR3713A(d), DFR3715A(d), DFR3716A(d), DFR3732A(d), DFR3735A(d), DFR3738A(d), DFR3613A(d), DFR3615A(d), DFR3616A(d), DFR3632A(d), DFR3635A(d), DFR3638A(d)	V-0,110°C,Min. thickness 0.40mm	UL 94, UL 746	UL E199019	

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
(Alt.)	CHENGDU KANGLONGXIN PLASTICS CO LTD	KLX FRPC-1880, KLX FRPC-1880B, KLX FRPC-1880-83, KLX FRPC-1880-83B, KLX FRPC-1880-1, KLX FRPC-1880B-1, KLX FRPC-1880-2, KLX FRPC-1880B-2, KLX FRPC-1880-3, KLX FRPC-1880B-3, KLX FRPC-1880-NTC, KLX FRPC-1880B-NTC, KLX FRPC-1880B-HY, KLX FRPC-1880B-K, KLX FRPC-1880-K, KLX FRPC-1860-YM, KLX FRPC-1860B-YM, KLX FRPC-1880-YM, KLX FRPC-1880B-YM, KLX FRPC-1880W, KLX FRPC-1880W-1, KLX FRPC-1860B-KS, KLX FRPC-1860-KS, KLX FRPC-1880-KS, KLX FRPC-1880B-KS	V-0, 125°C, Min. thickness 0.40mm	UL 94, UL 746	UL E315185
PCB (Power PCB)	DONGGUAN DONGHONGXIN ELECTRONICS CO LTD	DHXX2	V-0, 130°C	UL 94 UL 796	UL E342984
(Alt.)	Interchangeable	Interchangeable	V-1 or better, Min. 105°C	UL 94 UL 796	UL
PCB (Sec. PCB)	Interchangeable	Interchangeable	V-1 or better, Min. 105°C	UL 94 UL 796	UL

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Fuse Resistor (F1)	Shenzhen Kayocota Electronics Co., Ltd	FRKNP-2WS	5.1R-2WS, 3.3R-2WS, 6.8R-2WS	IEC 62368-1:2018 EN IEC 62368-1:2020 BS EN IEC 62368-1:2020	Test with appliance
(Alt.)	Anhui Changsheng Electronics Co., Ltd	RXF21-2WS	5.1R-2WS, 3.3R-2WS, 6.8R-2WS	IEC 62368-1:2018 EN IEC 62368-1:2020 BS EN IEC 62368-1:2020	Test with appliance
Heat-shrinkable tube	SHENZHEN WOER HEATSHRINKABLE MATERIAL CO LTD	RSFR-H	600VAC, 125 °C, VW-1	UL 224	UL E203950
(Alt.)	Interchangeable	Interchangeable	Min. 600VAC, 125 °C, VW-1	UL 224	UL E203950
Choke(L1)	Interchangeable	Interchangeable	Min. 130°C	IEC 62368-1:2018 EN IEC 62368-1:2020 BS EN IEC 62368-1:2020	Test with appliance
Choke(L2)	Interchangeable	Interchangeable	Min. 130°C	IEC 62368-1:2018 EN IEC 62368-1:2020 BS EN IEC 62368-1:2020	Test with appliance
E-Capacitor (EC1, EC2)	Interchangeable	Interchangeable	10µf,400V,105°C	IEC 62368-1:2018 EN IEC 62368-1:2020 BS EN IEC 62368-1:2020	Test with appliance
E-Capacitor (EC4)	Interchangeable	Interchangeable	4.7µf,50V,105°C	IEC 62368-1:2018 EN IEC 62368-1:2020 BS EN IEC 62368-1:2020	Test with appliance

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Bridge Diode (BD1)	Interchangeable	Interchangeable	Min. 1.0A, Min. 600V	IEC 62368-1:2018 EN IEC 62368-1:2020 BS EN IEC 62368-1:2020	Test with appliance
J2 lead wire	Interchangeable	Interchangeable	Min. 300V, 80°C, 26AWG, VW-1	UL 758	UL
Transformer (T1)	JIASHENGYUAN ELECTRONICS CO.,LTD	TW012-T1	Class A	IEC 62368-1:2018 EN IEC 62368-1:2020 BS EN IEC 62368-1:2020	Test with appliance
-Bobbin	CHANG CHUN PLASTICS CO LTD	T200HF	V-0, 150°C Measure thickness: Min.1.0	UL 94, UL 746	UL E59481
-Magnet Wire	EASEBOND ELECTRICAL MATERIAL (DONGGUAN) CO LTD	xUEW	130°C	UL 1446	UL E173779
-Magnet Wire (Alt.)	GUANGZHOU WANBAO ENAMELLED WIRE CO LTD	xUEW-130	130°C	UL 1446	UL E167402
-Magnet Wire (Alt.)	Interchangeable	Interchangeable	Min.130°C	UL 1446	UL
-Triple Insulated Wire	Guangzhou Wanbao Electronic Material Co Ltd	DTM-B	130°C	EN IEC 62368-1 IEC 62368-1 UL 2353	VDE 40044801 UL E323485
-Insulation Tape	JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO LTD	CT* (b)(g)	130°C	UL 510	UL E165111
-Varnish	John C Dolph Co	BC-346A	130°C	UL 1446	UL E317427
Transformer (T1) (Alt.)	Dongguan City Sun Mao Electronics Co.,Ltd.(Hung Kay Indusrtial Co.,Ltd.)	TW012-T1	Class A	IEC 62368-1:2018 EN IEC 62368-1:2020 BS EN IEC 62368-1:2020	Test with appliance

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

-Bobbin	CHANG CHUN PLASTICS CO LTD	T375J(G5)(G6)	V-0, 150°C Measure thickness: Min.1.0	UL 94, UL 746	UL E59481
-Magnet Wire	SHENZHEN DAYANG INDUSTRY CO LTD	xQAN/130	130°C	UL 1446	UL E176101
-Magnet Wire (Alt.)	Interchangeable	Interchangeable	Min.130°C	UL 1446	UL
-Triple Insulated Wire	Furukawa Electric Co., Ltd.	TEX-E	130°C	EN IEC 62368-1 IEC 62368-1 UL 2353	VDE 006735 UL E206440
-Insulation Tape	JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO LTD	CT* (b)(g)	130°C	UL 510	UL E165111
-Varnish	YUEYANG GREEN TECHNOLOGY CO LTD	JX-1150*	130°C	UL 1446	UL E303754

Supplementary information:

¹⁾ Provided evidence ensures the agreed level of compliance. See OD-2039.

²⁾ Description line content is optional. Main line description needs to clearly detail the component used for testing.

(#): The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.

Appendix A - EUT PHOTOS



Photo 1 general view



Photo 2 general view

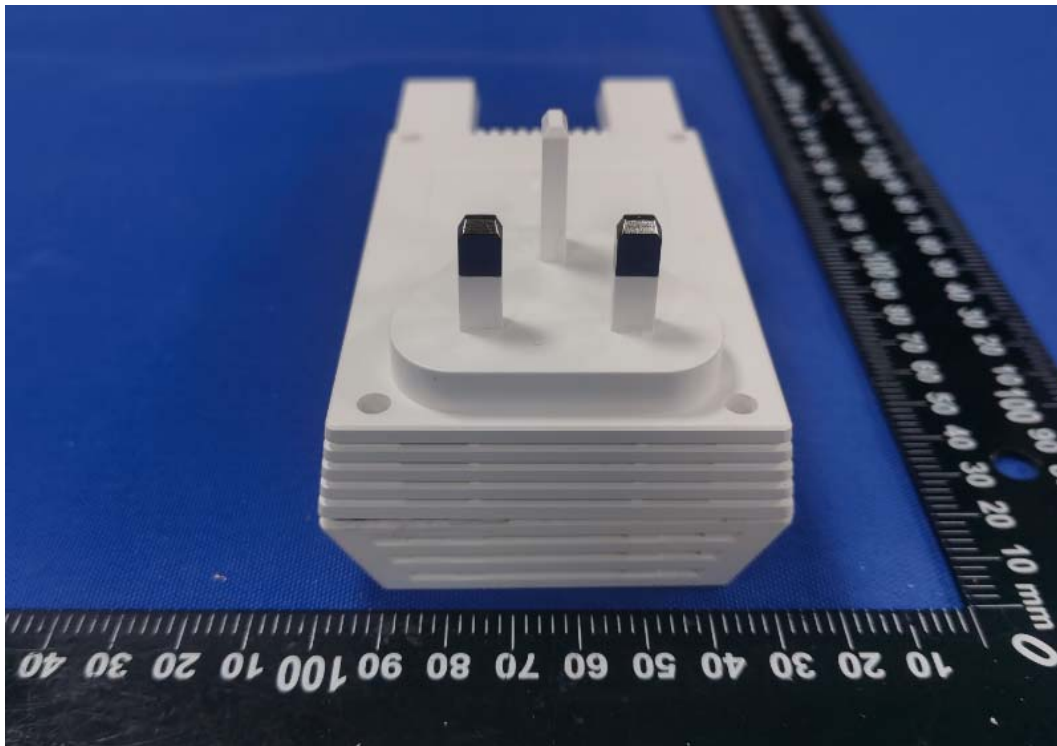


Photo 3 general view(UK Plug)

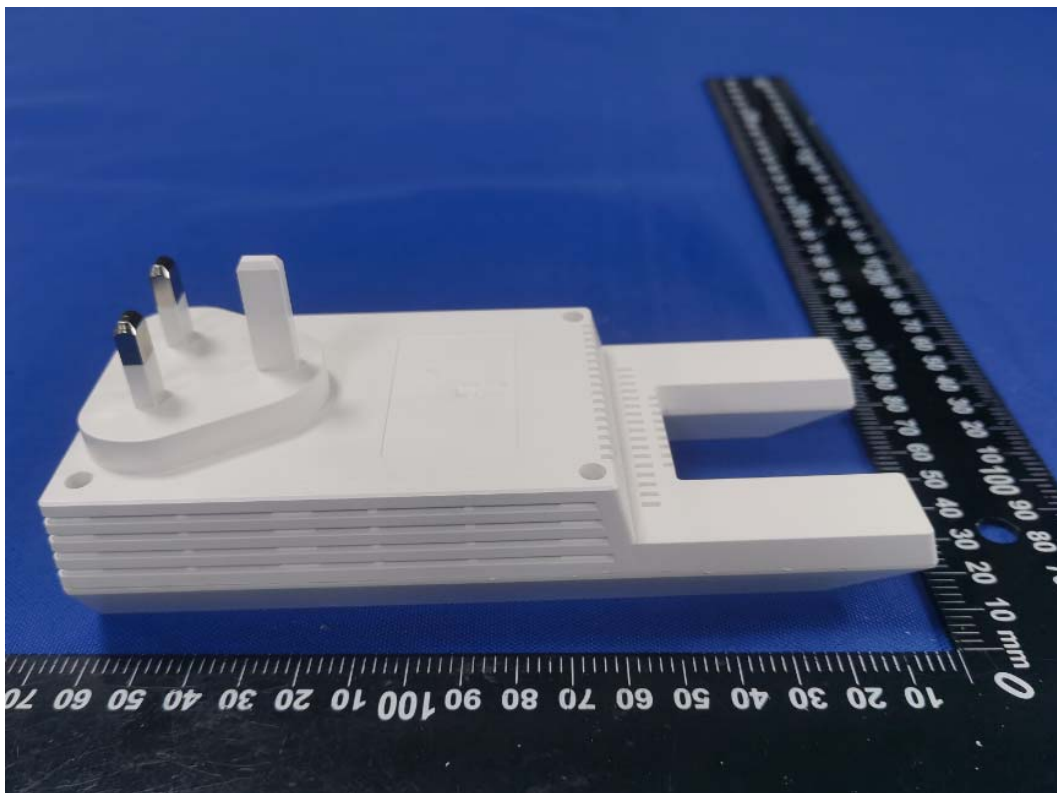


Photo 4 general view(UK Plug)

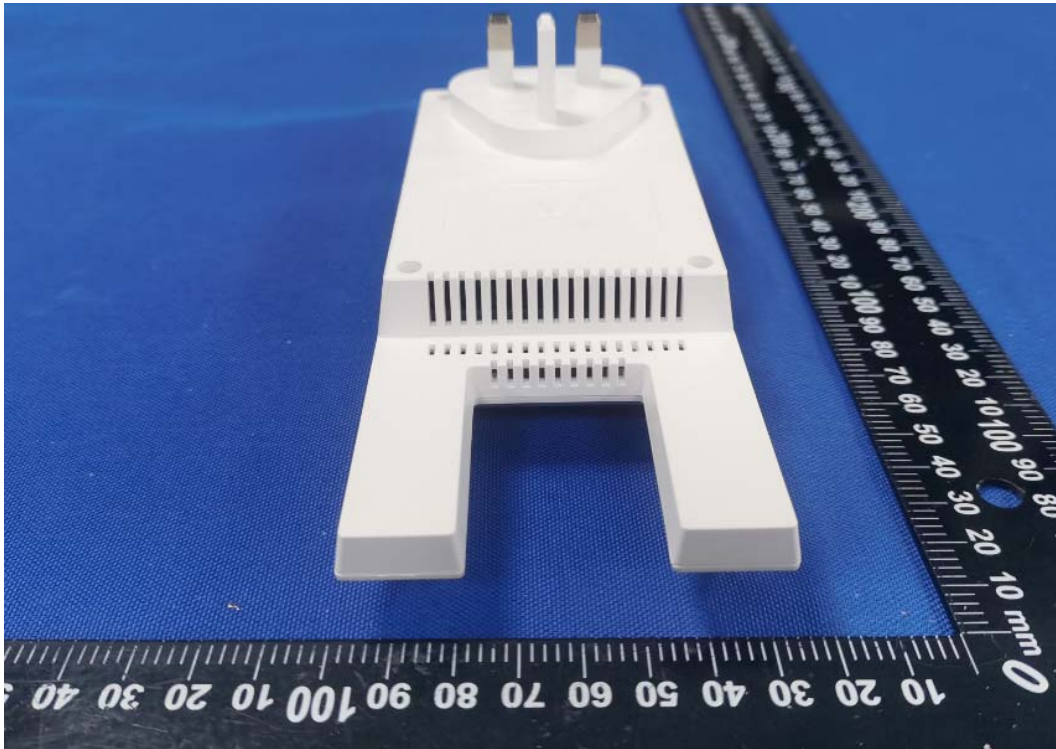


Photo 5 general view(UK Plug)

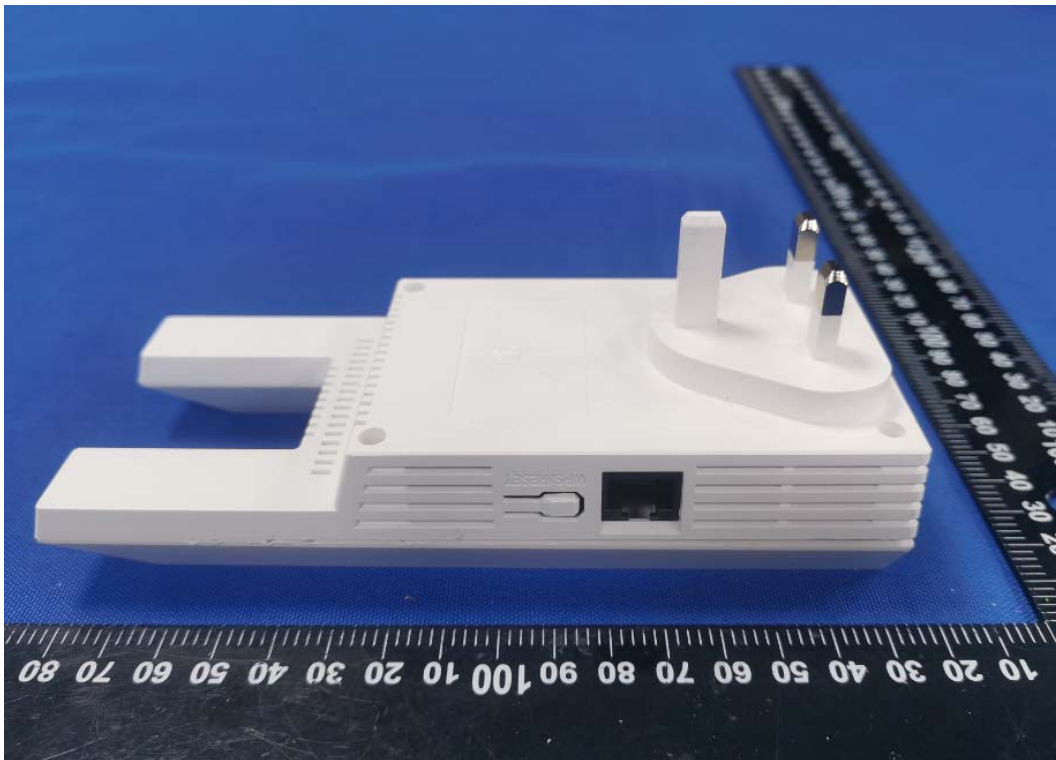


Photo 6 general view(UK Plug)

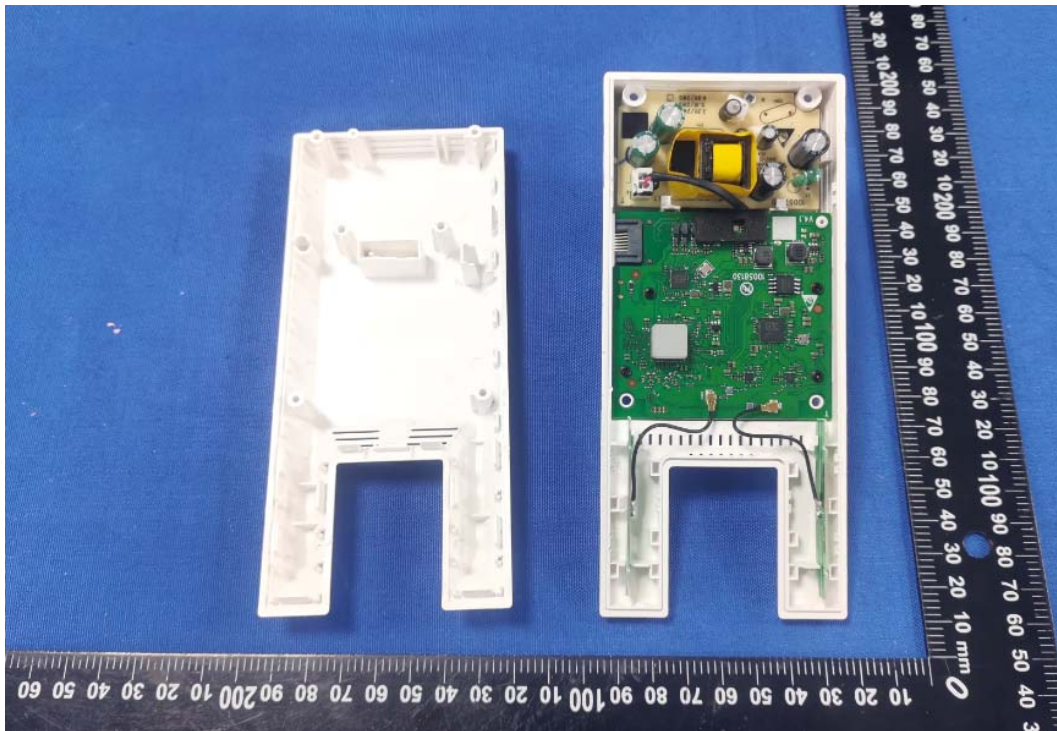


Photo 7 Internal view(UK Plug)

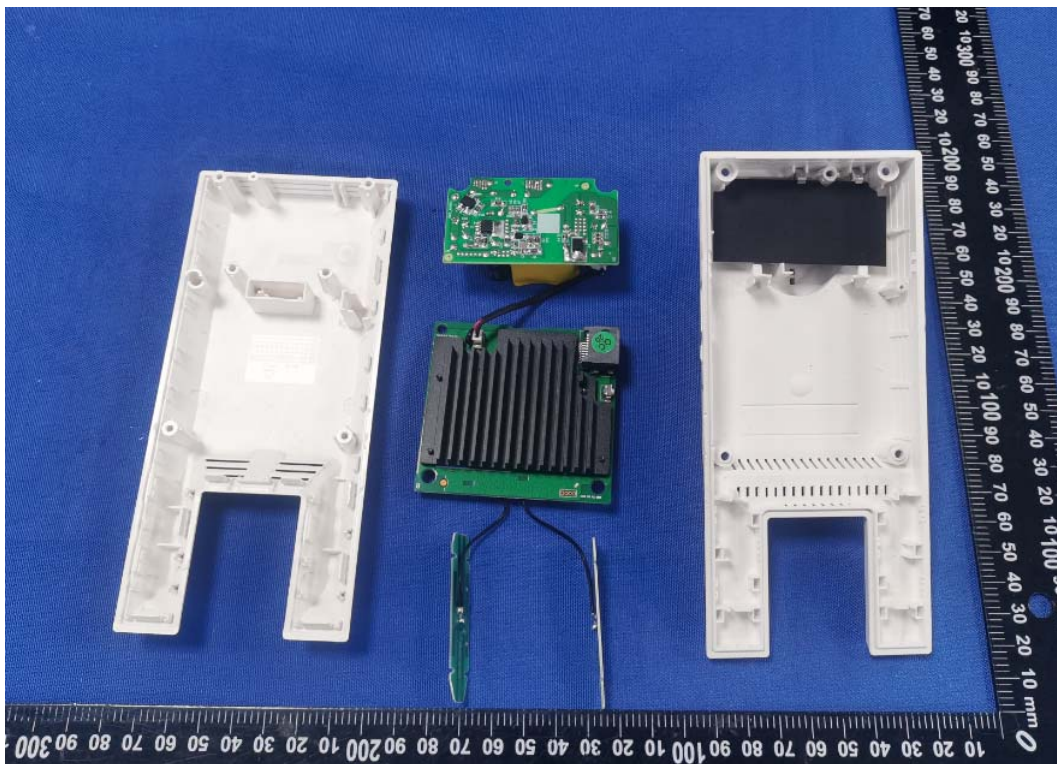


Photo 8 Internal view(UK Plug)

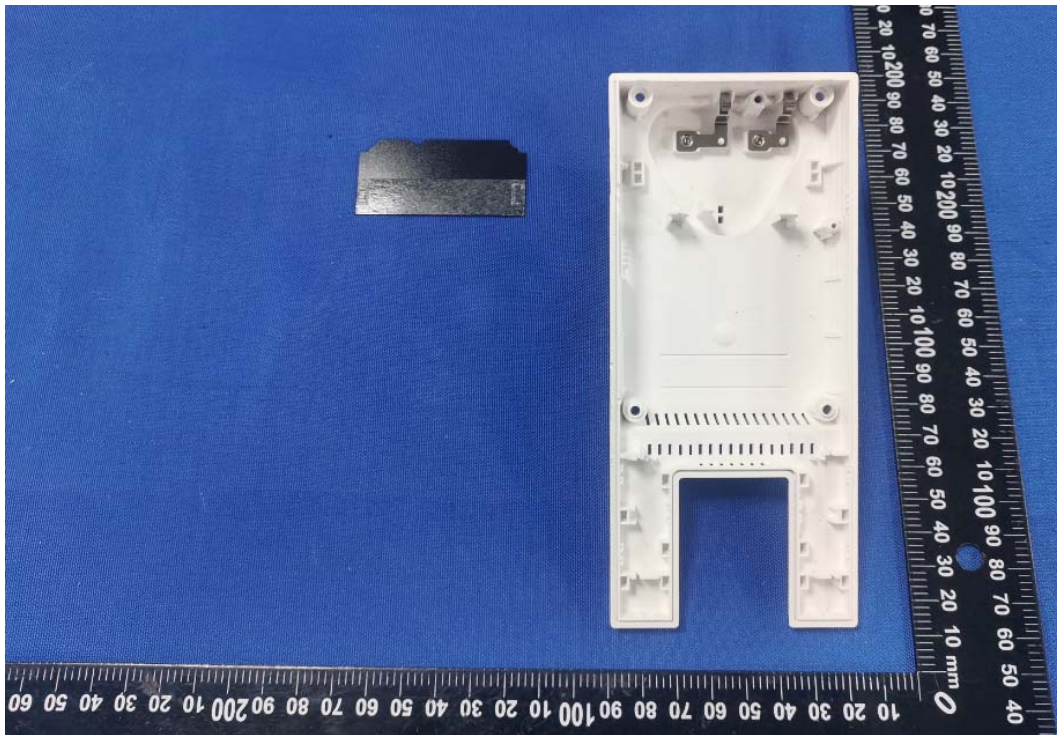


Photo 9 Internal view(UK Plug)

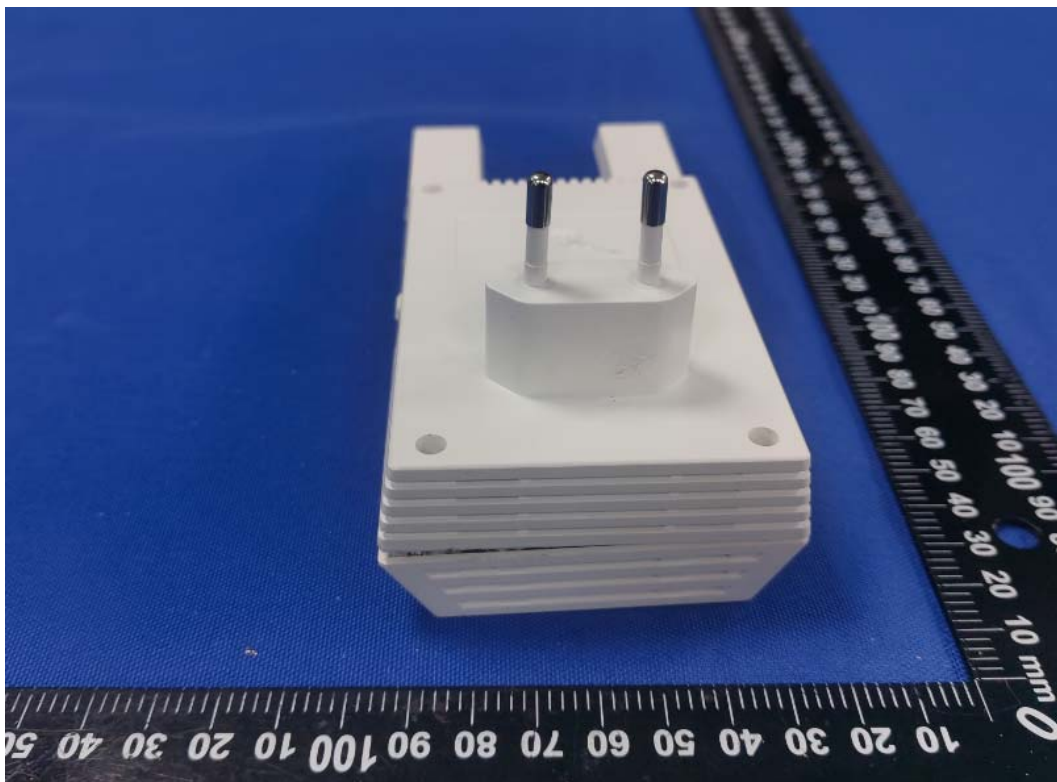


Photo 10 general view(EU Plug)

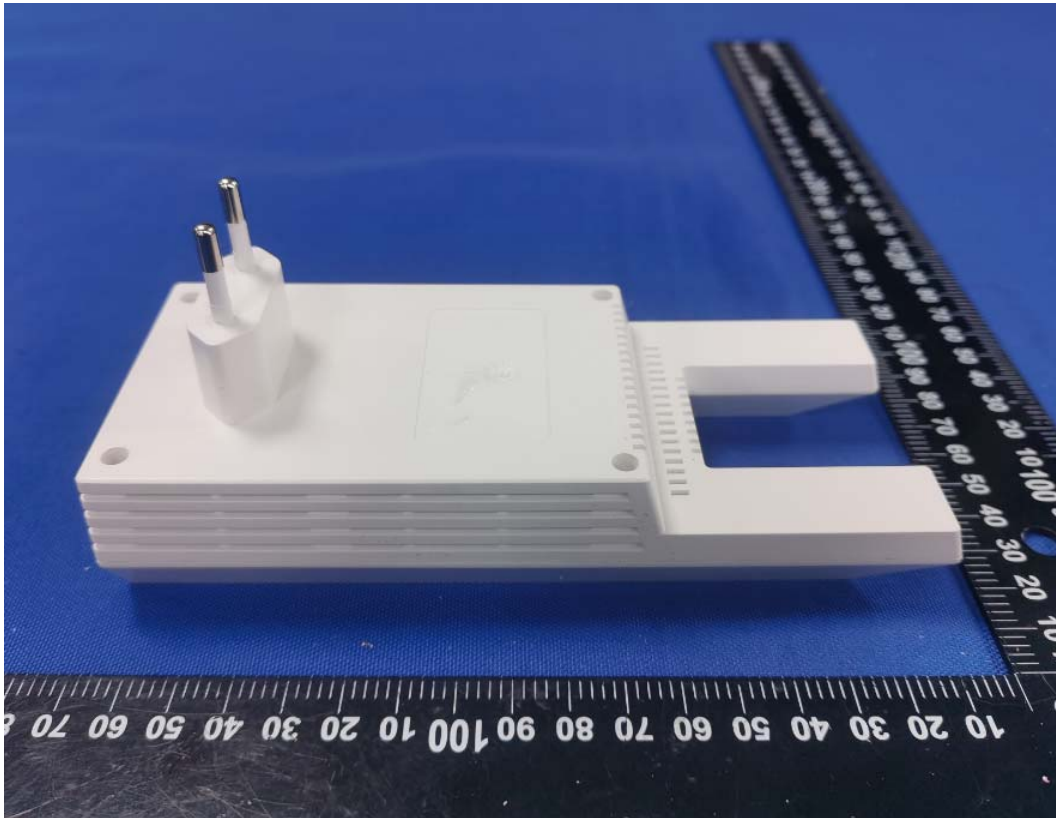


Photo 11 general view(EU Plug)

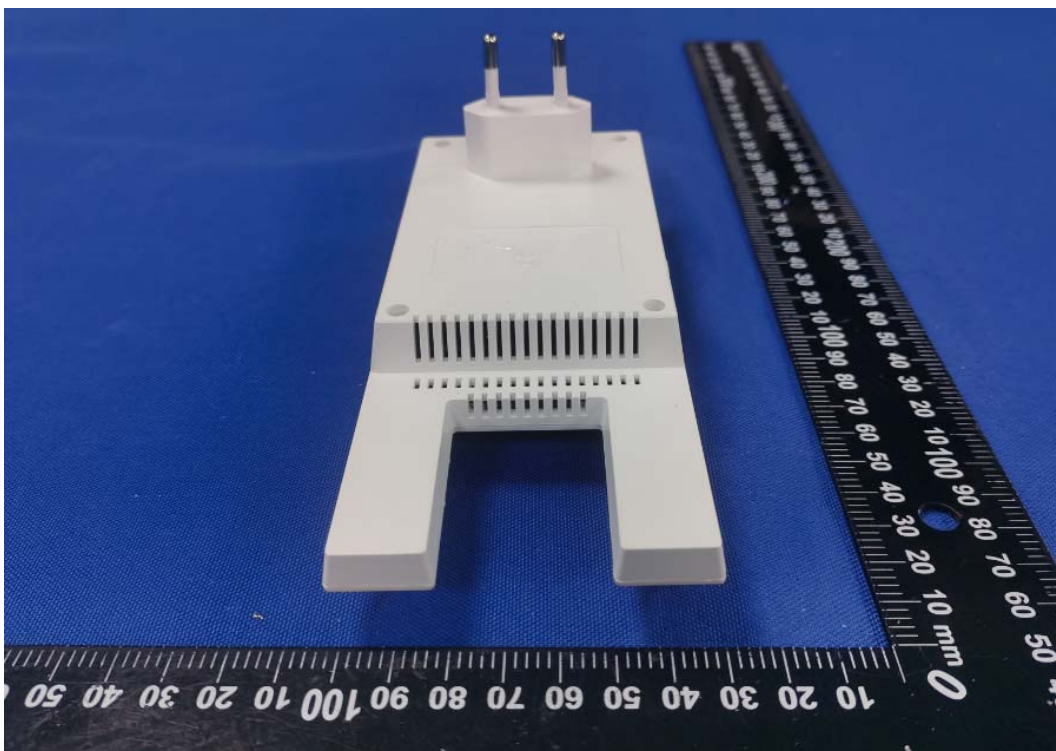


Photo 12 general view(EU Plug)



Photo 13 general view(EU Plug)

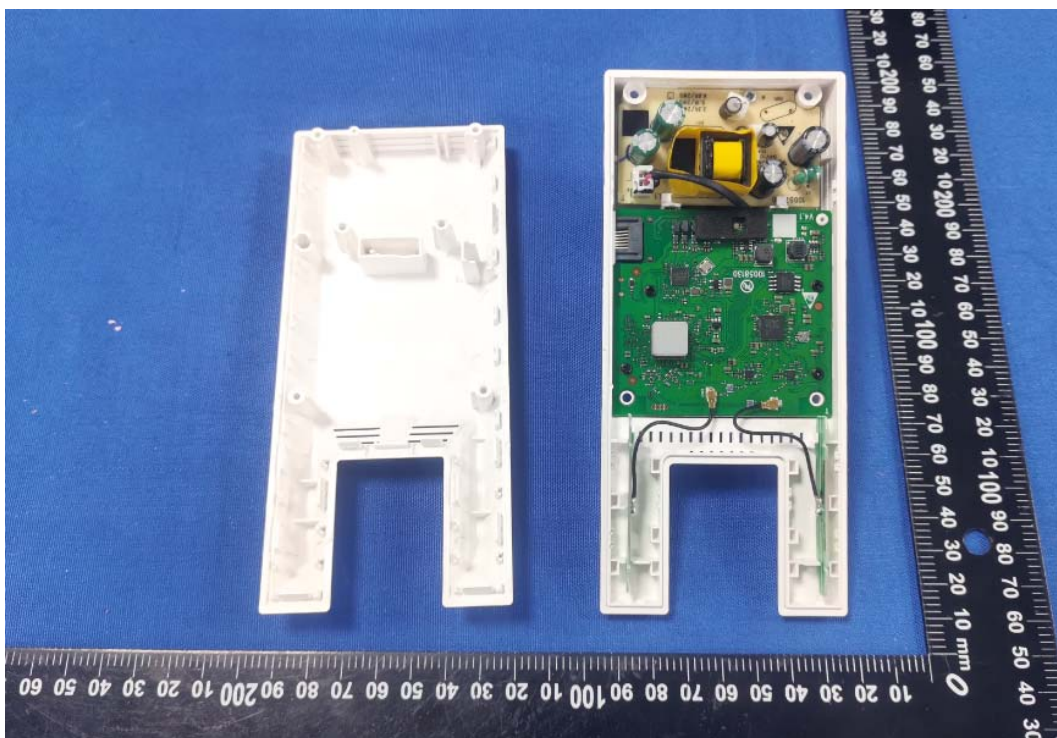


Photo 14 Internal view(EU Plug)

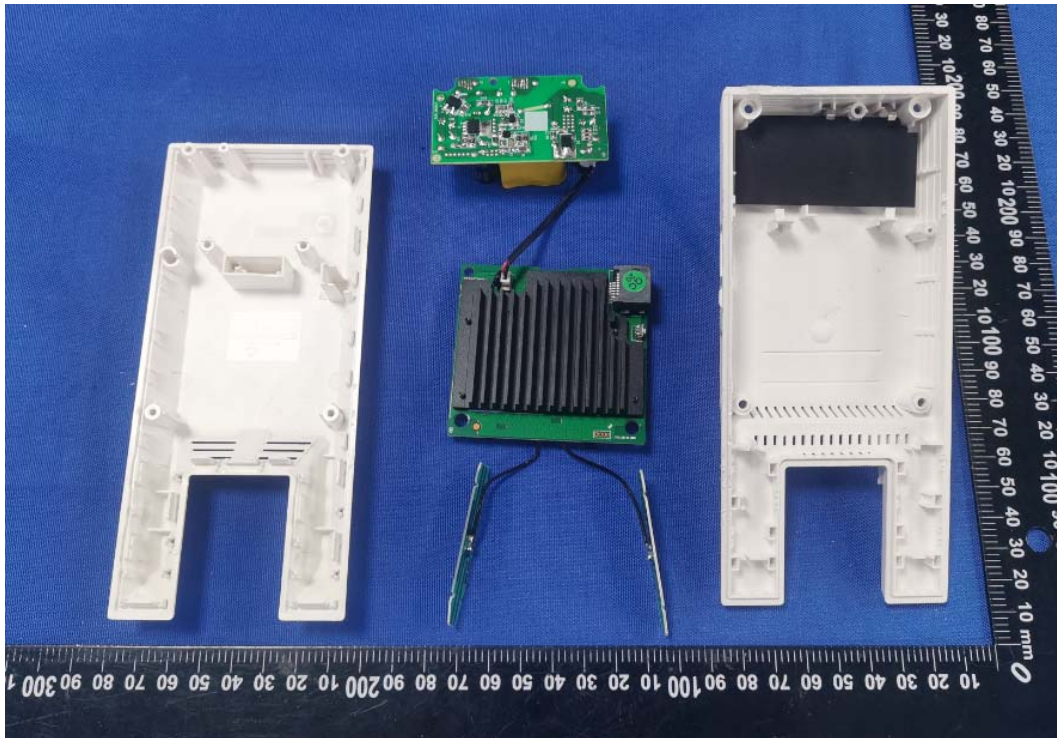


Photo 15 Internal view(EU Plug)

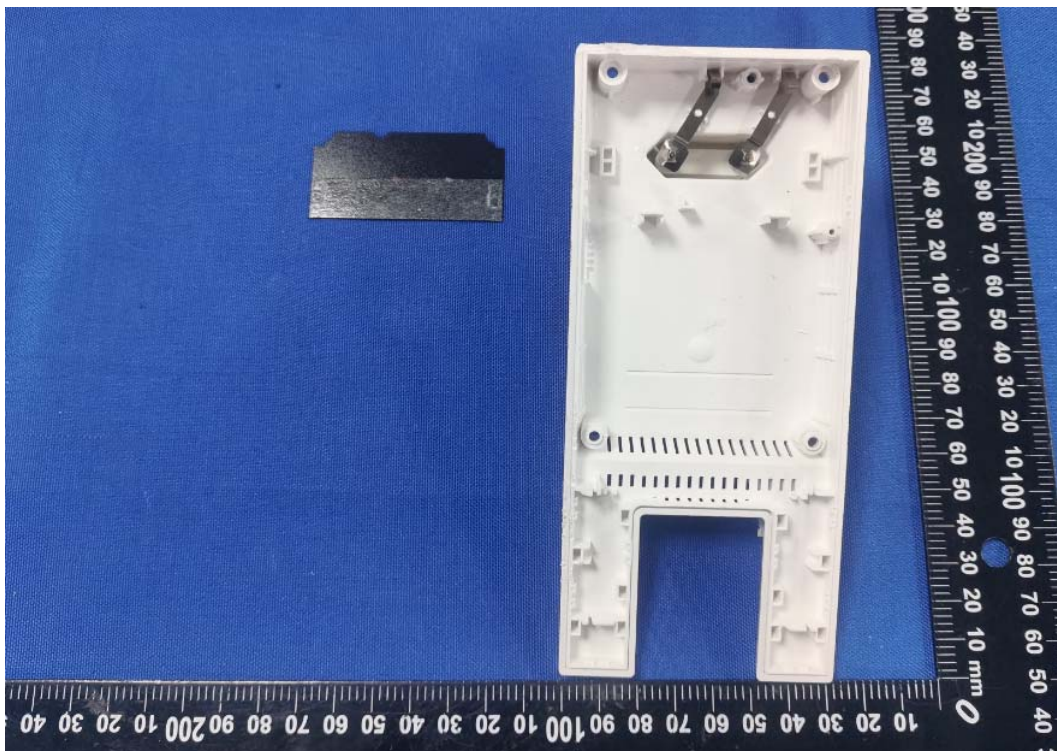


Photo 16 Internal view(EU Plug)

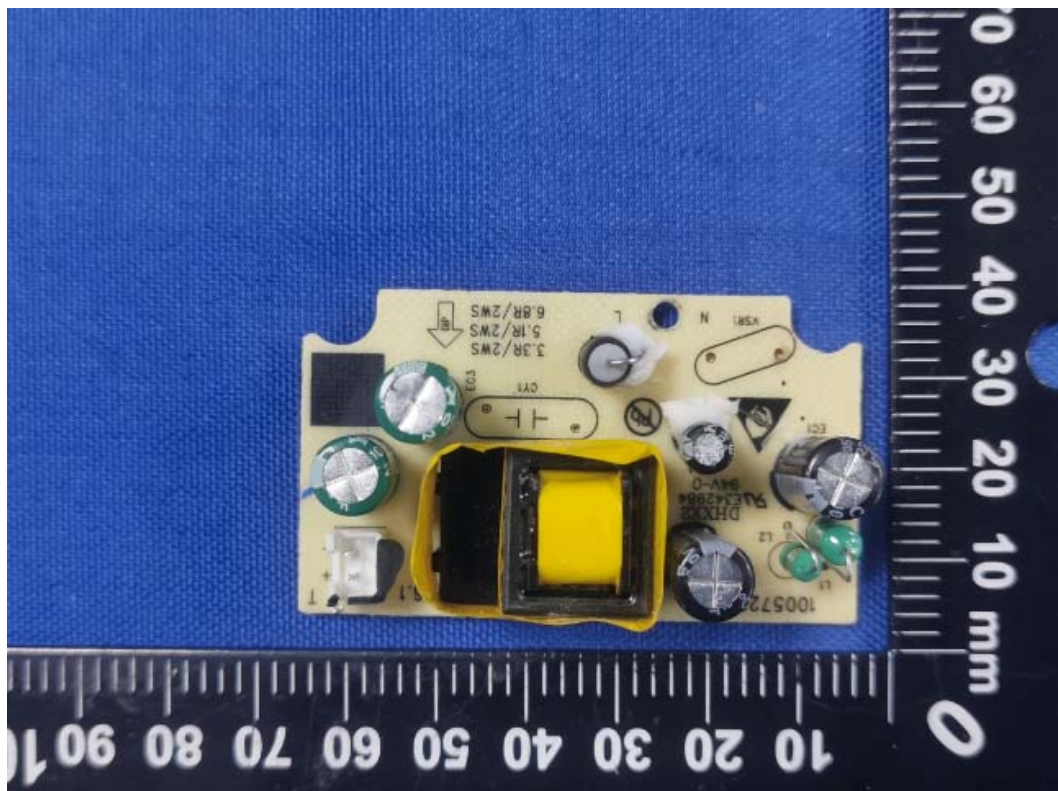


Photo 17 Top power PCB view

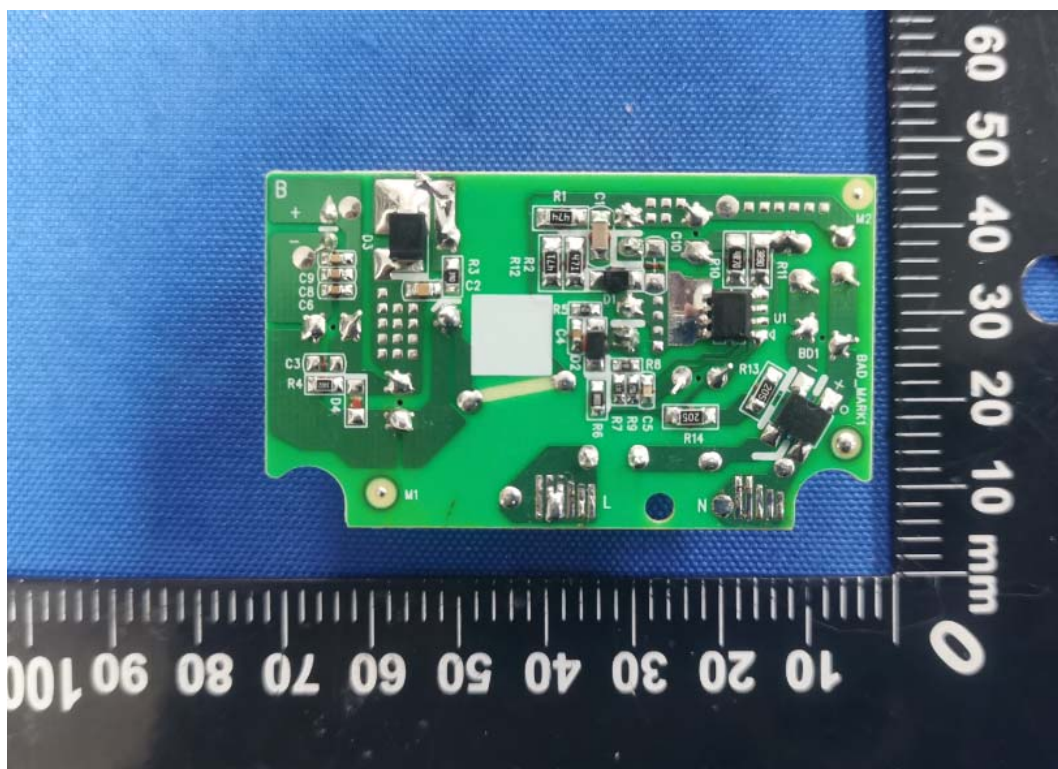


Photo 18 Bottom power PCB view

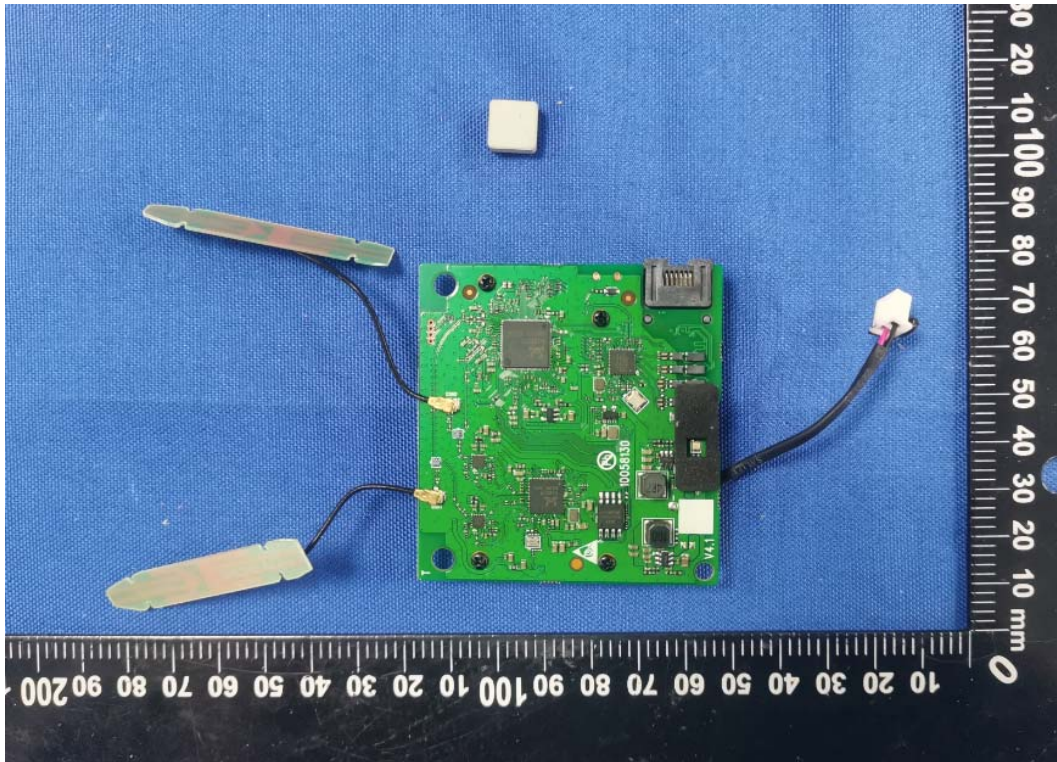


Photo 19 Top Sec. PCB view

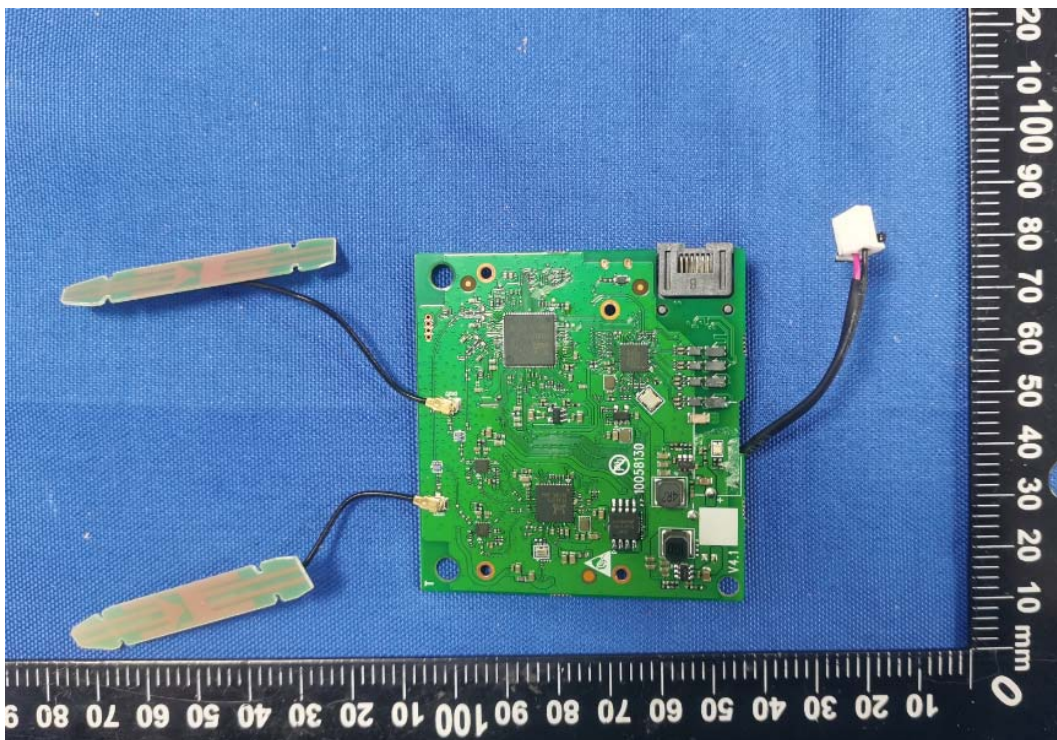


Photo 20 Top Sec. PCB view

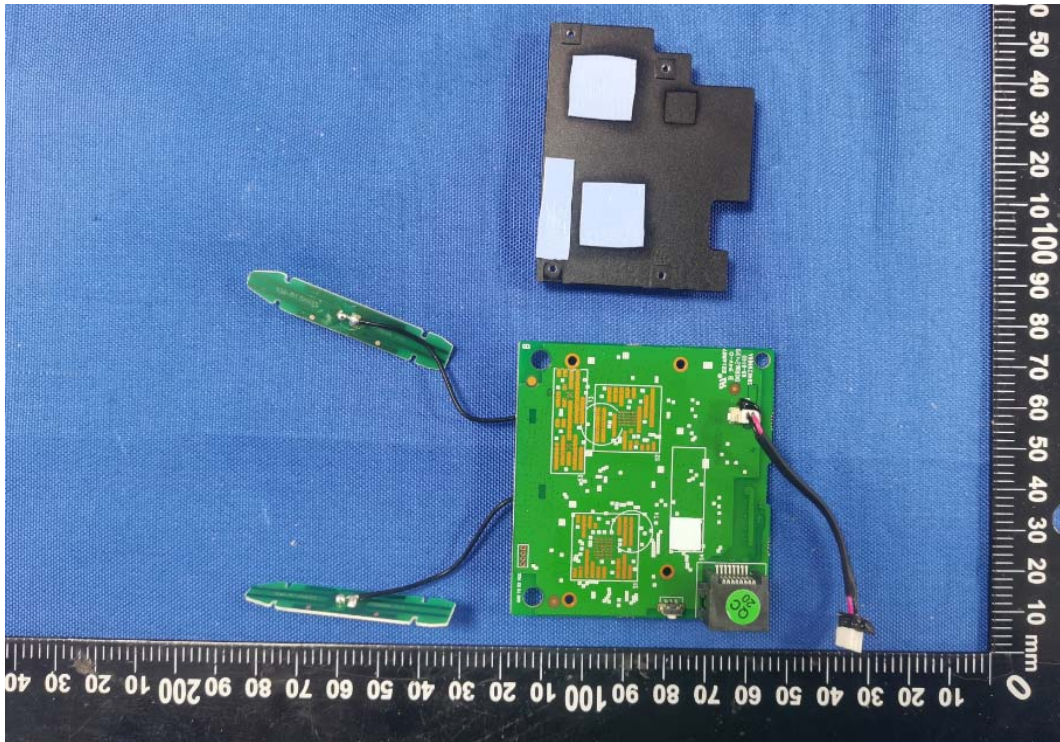


Photo 21 Bottom Sec. PCB view

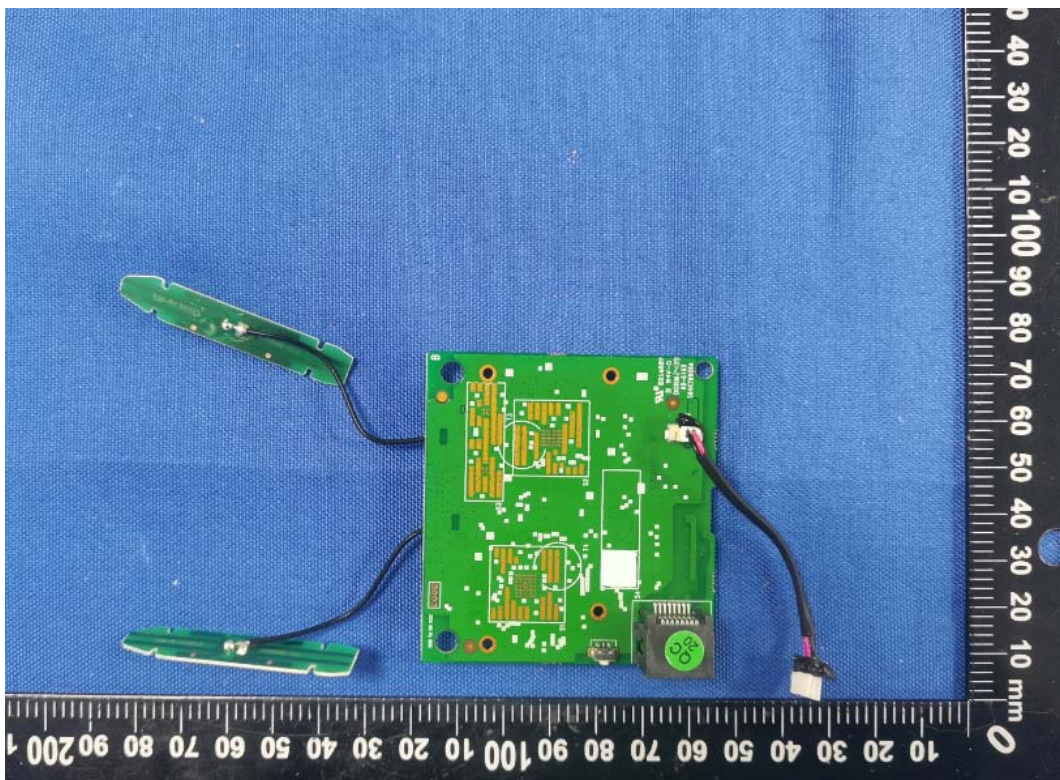


Photo 22 Bottom Sec. PCB view



Photo 23 Transformer view(JIASHENGYUAN)



Photo 24 Transformer view(JIASHENGYUAN)



Photo 25 Transformer view(JIASHENGYUAN)

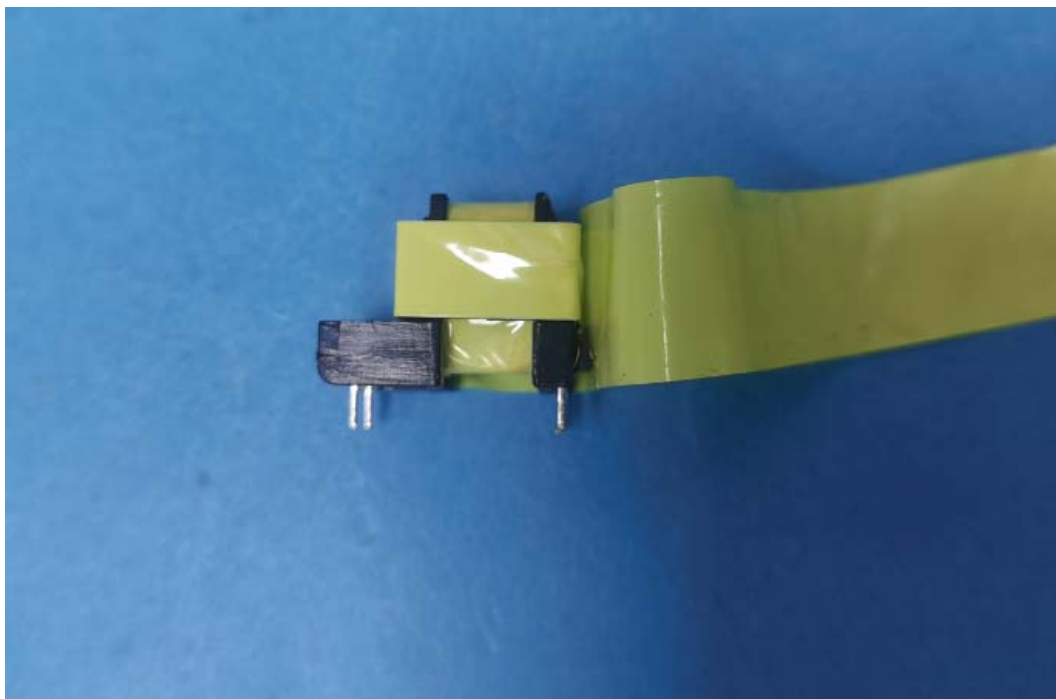


Photo 26 Transformer view(JIASHENGYUAN)

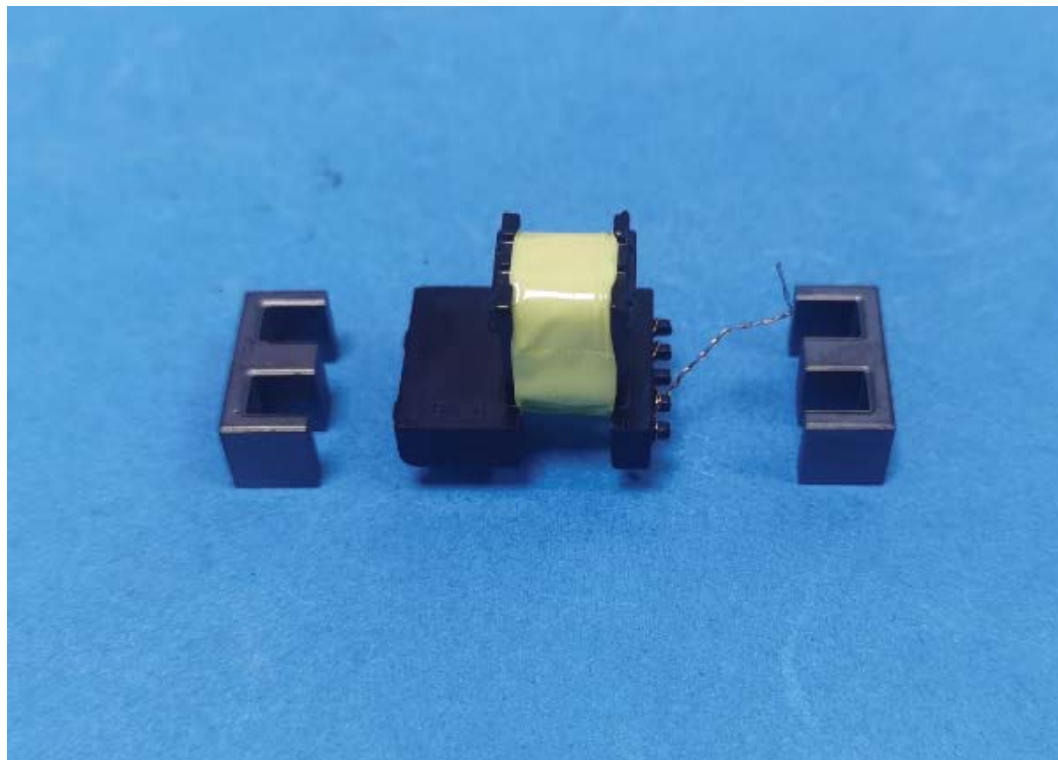


Photo 27 Transformer view(JIASHENGYUAN)


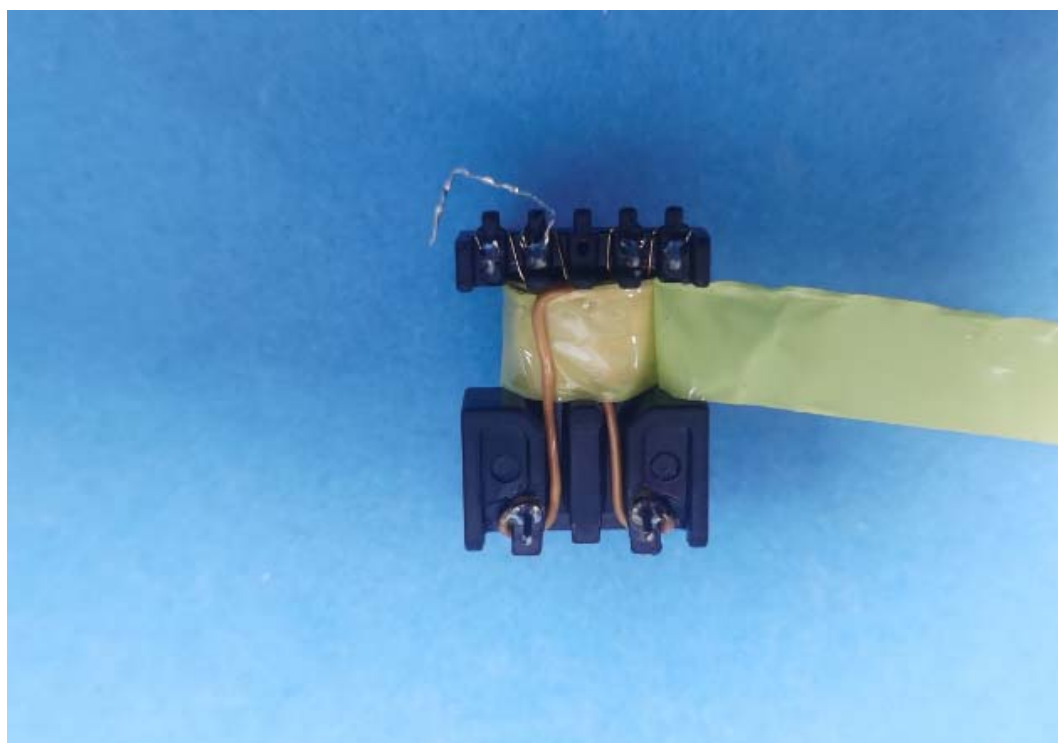


Photo 28 Transformer view(JIASHENGYUAN)

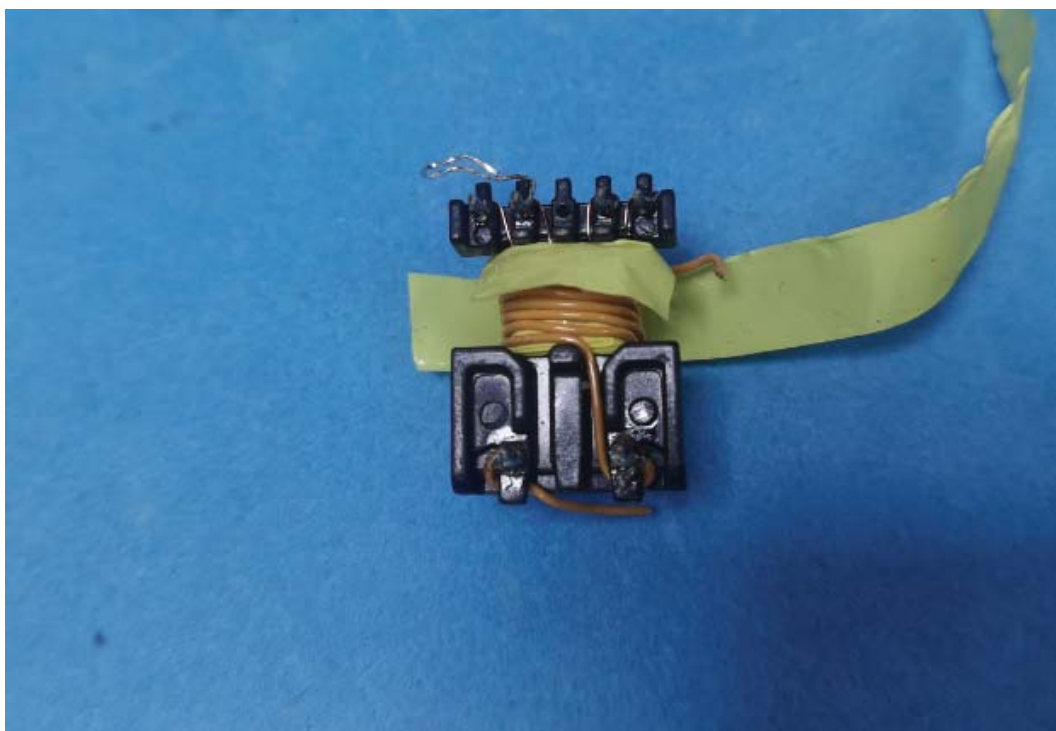

Note: Insulating tape provides mechanical protection between TIW and magnet wire.

Photo 29 Transformer view(JIASHENGYUAN)

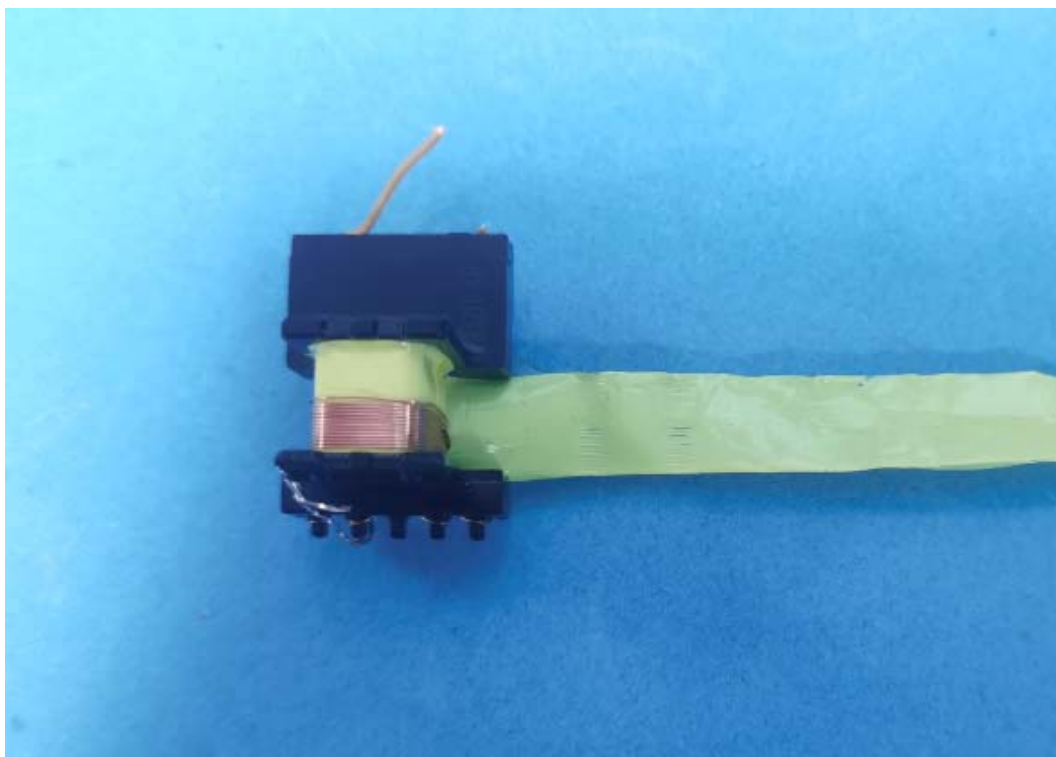


Photo 30 Transformer view(JIASHENGYUAN)



Photo 31 Transformer view(Sun Mao)



Photo 32 Transformer view(Sun Mao)



Photo 33 Transformer view(Sun Mao)



Photo 34 Transformer view(Sun Mao)

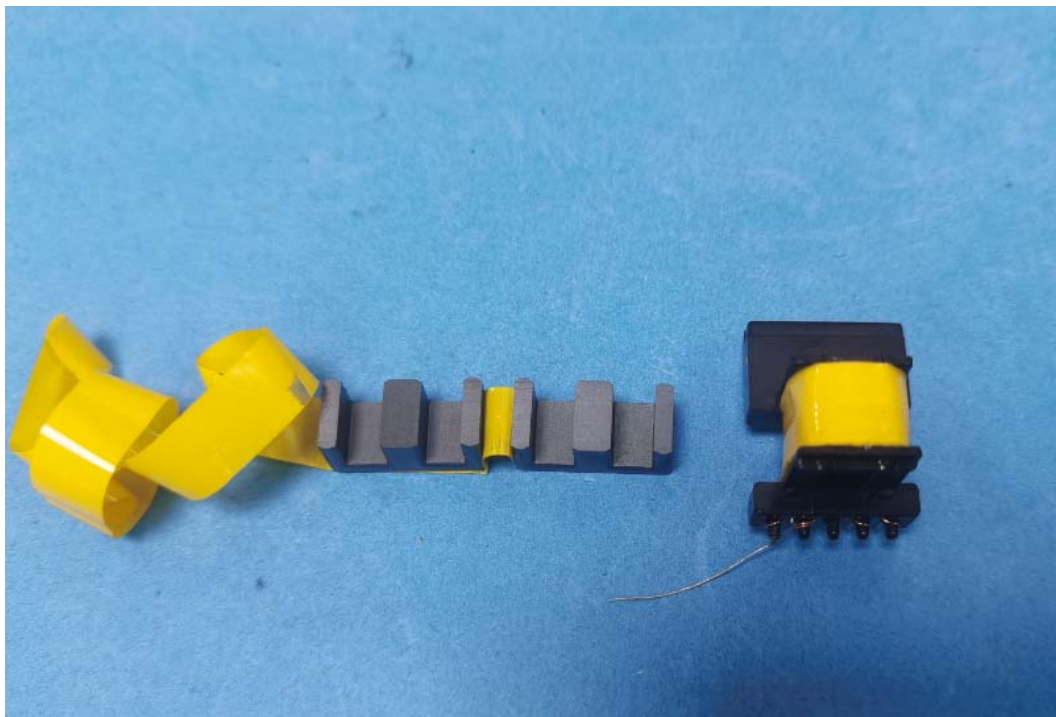


Photo 35 Transformer view(Sun Mao)


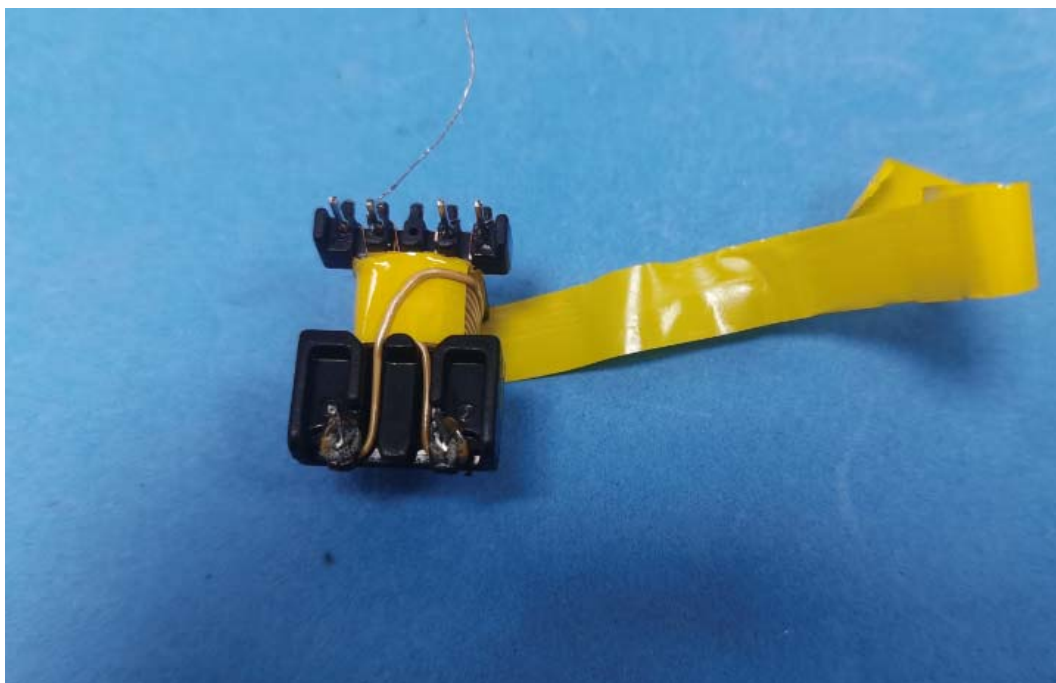


Photo 36 Transformer view(Sun Mao)

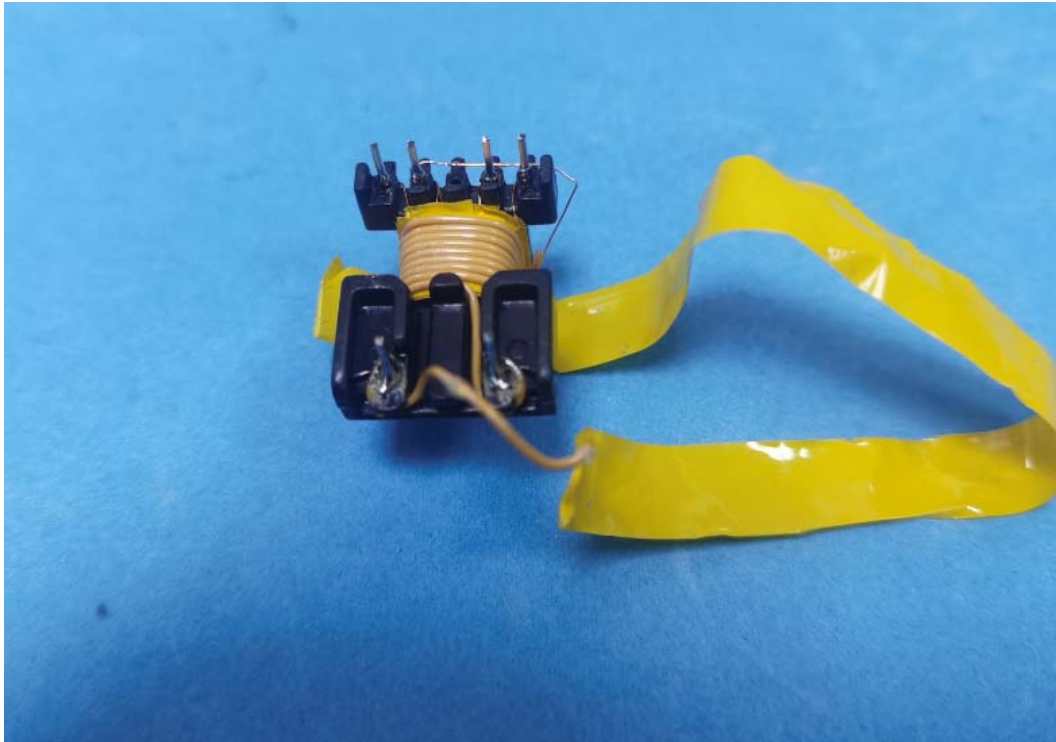

Note: Insulating tape provides mechanical protection between TIW and magnet wire.

Photo 37 Transformer view(Sun Mao)

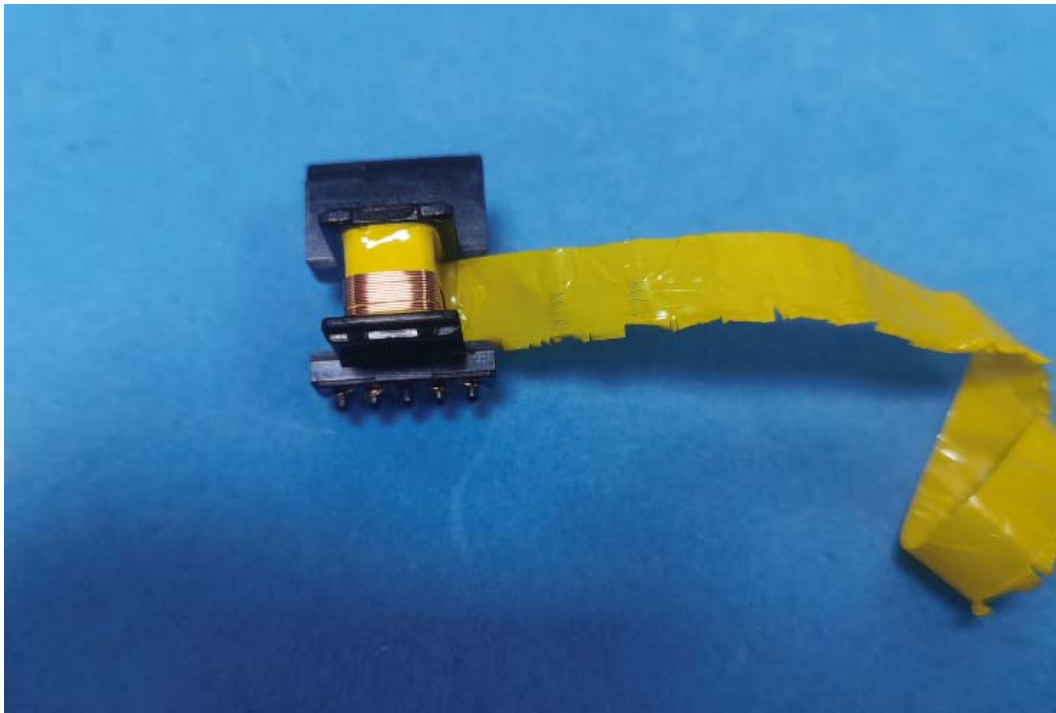


Photo 38 Transformer view(Sun Mao)

Appendix B-Directions

1. The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.
2. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
3. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
5. This report cannot be reproduced except in full, without prior written approval of the Company.
6. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

*****End of Report*****